

Please type a plus sign (+) inside this box

PTO/SB/05 (12/97)  
Approved for use through 9/30/00 OMB 0651-0032  
Patent and Trademark Office. U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

# Utility Patent Application Transmittal

(only for nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket  
No.

KAT 232

DATE

November 2, 2000

Inventor (s) : Shinji HAYAKAWA, Satoshi WATANABE, Atsushi SHIMBO, AND Hiromi AOYAGI

TITLE:

PACKET RECEIVER WITH THE INFLUENCE OF JITTER AND PACKET LOSSES REDUCED BEFORE A BUFFER BECOMES IDLE DUE TO DATA DELAYS AND PACKET RECEIVING METHOD USING THE SAME

## APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

1. ☒ Patent Application Fee Determination Record  
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification [Total Pages 47]  
(preferred arrangement set forth below)  
- Descriptive title of the Invention  
- Cross References to Related Applications  
- Background of the Invention  
- Brief Summary of the Invention  
- Brief Description of the Drawings (if filed)  
- Detailed Description  
- Claim(s)  
- Abstract of the Disclosure

3. ☒ Drawing(s) Figures 1-15 [Total Sheets 15]

4. Oath or Declaration [Total Sheets 4]  
☒ Newly executed (original or copy)

## ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment & Recordation Cover Sheet [Total pages 5]  
9. ☒ Information Disclosure Statement (IDS)/PTO-1449  
[Total Pages 2] [Total References 3]  
12. ☐ Preliminary Amendment [Total Pages ]  
13. ☒ Return Receipt Postcard (MPEP 503)  
14. ☐ Small Entity Statement(s) [Total Pages ]  
15. ☒ Certified Copy of Priority Document(s)  
The rights of priority are claimed under 35 U.S.C. § 119 of Japanese Application No. 2000-085744 Filed March 27, 2000  
16. ☐ Other: \_\_\_\_\_

## 18. CORRESPONDENCE ADDRESS

If there is no check attached, or the check is made out for an insufficient amount, please attach any deficiency to our Deposit Account No. 18-0002 and notify us accordingly.

NAME						Steven M. Rabin (Reg. No. 29,102) - Rabin & Champagne, P.C.					
ADDRESS						1101 14 <sup>th</sup> Street, N.W. Suite 500					
CITY		Washington		STATE		D.C.		ZIPCODE		20005	
COUNTRY		USA		TELEPHONE		(202) 659-1915		FAX		(202) 659-1898	

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box CPA, Washington, DC 20231.

PACKET RECEIVER WITH THE INFLUENCE OF JITTER AND PACKET  
LOSSES REDUCED BEFORE A BUFFER BECOMES IDLE DUE TO DATA  
DELAYS AND

PACKET RECEIVING METHOD USING THE SAME

5

BACKGROUND OF THE INVENTION

Field of the Invention

10       The present invention relates to a packet receiver  
advantageously applicable to a speech transmission and receipt  
system of the type sending a speech signal in the form of  
packets and decoding the packets to thereby reproduce the  
original speech signal, and a packet receiving method using  
15       the same.

Description of the Background Art

20       In a speech transmission and receipt system of the type  
transferring packets, a packet transmitter digitizes a speech  
signal input thereto, temporarily stores the resulting speech  
data, and sequentially codes the speech data frame by frame.  
Further, the packet transmitter packetizes the frame-by-frame  
coded speech data. Specifically, the packet transmitter  
generally stores the coded speech data until they reach a  
25       preselected amount, and then adds header information to the  
speech data of each frame to thereby packetize the speech data.  
The packetized speech data are sent to a packet receiver via  
a communication network.

30       The packet receiver temporarily stores the packets received  
from the packet transmitter and executes a procedure inverse  
to the procedure of the packet transmitter. Specifically,  
the packet receiver depacketizes the packet data, decodes the  
resulting data on a frame basis to thereby produce speech data,  
35       and transforms the decoded data to an analog speech signal.

So long as packet transmission conditions are ideal, the packets are sent without any loss and implement ideal speech communication free from the interruption or the skip of a speech. The interruption and the skip of a speech respectively  
5 refer to intermittent interruptions occurring in a speech output from the packet receiver and a continuous loss of the speech that makes the speech hard to follow.

However, ideal packet transmission stated above is rarely  
10 achievable for the following reasons. Traffic on a packet communication network varies every moment because a number of users access the network at the same time. Actual packet communication is dependent on the variation of the traffic, so that the transmission time of the network is not constant.  
15 As a result, some of the packets sent from the packet transmitter arrive at the packet receiver with delays. In the worst case, some packets are practically lost while being transferred via the network. The delays cause the intervals between consecutive packets received by the packet receiver to vary, i.e., bring about jitter. Consequently, packets  
20 expected to arrive at the packet receiver are lost, resulting in the interruption of a speech. When a packet or a frame is lost, an error frame may be generated on the basis of frame data immediately preceding the above frame in order to maintain the continuity of sound. Even this kind of scheme, however,  
25 cannot prevent the quality of reproduced sound from being degraded.

The delay of a received packet makes, e.g., a buffer  
30 included in the packet receiver idle for a moment. Such delays sequentially accumulate and appear as delays from preselected times for reproduction during processing following data read-out. Let the idle state of the buffer ascribable to the accumulation of delays be referred to as an idle buffer state



cancel soundless portions ascribable to packet delays. The time domain compression, however, requires a prohibitive amount of calculations and extremely high calculation performance. Moreover, Prior Art Document 2 stores a packet delay or idle state and executes time domain compression, which corresponds to the delay, with speech data derived from the following received packet. This procedure involves the storage of a delay and calculations for allotting compression ratios to speech data. Consequently, Prior Art Document 2 critically increases the cost of the packet receiver and is apt to further increase the amount of calculations.

The measure taught in Prior Art Document 3 against jitter and packet losses causes a packet transmitter to code and send only sound portions and causes a packet receiver to feed a single dummy packet for decoding when a packet delay or a packet loss occurs. Specifically, decoding is effected with a single dummy frame without waiting for the arrival of the next packet at the packet receiver. A packet arrived at the packet receiver while decoding is under way is dealt with as a processed packet and discarded in order to obviate a delay. A problem with Prior Art Document 3 is that the insertion ratio varies over a broad range in dependence on the capacity of a receipt buffer for storing received packets. For example, when the capacity of a receipt buffer is reduced to reduce the initial delay, many of received packets are delayed and increase the insertion ratio of the dummy packet, critically lowering the quality of a reproduced speech. Moreover, Prior Art Document 3 does not show or describe how the capacity of a receipt buffer is determined specifically. The measure taught in Prior Art Document 3 appears to be difficult to practice without resorting to the prohibitive repetition of a trial and error procedure.

#### SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a packet receiver capable of reproducing high quality data from packets without repeating a trial and error procedure against jitter and packet losses, and a packing receiving method  
5 using the same.

In accordance with the present invention, a packet receiver connected to a network for receiving communication packets sent from a packet transmitter and containing coded speech  
10 data via the network, decoding the packets and outputting decoded speech data includes a packet memory circuit for temporarily storing received packets including the communication packets in a FIFO (First-In First-Out) fashion to thereby form a queue. A read start threshold setting circuit sets, with  
15 respect to the length of the queue, a read start threshold at which the received packets should begin to be read out. A read comparing circuit determines whether or not the length of the queue has reached the read start threshold, and outputs a read command signal in accordance with the result of the  
20 decision. In response to the read command signal, a read control circuit causes the received packets to be read out of the packet memory circuit.

Also, in accordance with the present invention, a packet  
25 receiving method for receiving communication packets sent from a packet transmitter via a communication network and containing coded speech data via the network, decoding the communication packet begins with a first step of setting, before temporarily storing received packets including the communication packets  
30 to thereby form a queue, a read start threshold at which the received packets should begin to be read out, a discard start threshold at which they should begin to be discarded, and a discard end threshold at which they should end to be discarded with respect to the length of said queue. In a second step,

the received packets are temporarily stored to thereby form the queue. In a third step, the queue and the read start threshold are compared to each other in order to output, in accordance with the result of the comparison, a read command signal for reading out the received packets. In a fourth step, the received packets are read out in response to the read command signal and either one of a read request signal requesting the received packets to be decoded and a discard candidate read command signal output when the queue reaches the discard start threshold. In a fifth step, either one of the discarding and decoding of the received packets read out is selected. In a sixth step, when the discarding is selected, at least one of the received packets is discarded from the head of the queue while whether or not the length of the queue has reached the discard end threshold is determined. In a seventh step, when the decoding is selected, the received packets read out is decoded.

#### BRIEF DESCRIPTION OF THE DRAWINGS

The objects and features of the present invention will become more apparent from the consideration of the following detailed description taken in conjunction with the accompanying drawings in which:

FIG. 1 is a block diagram schematically showing a buffer controller included in a packet receiver embodying the present invention;

FIG. 2 is a schematic block diagram showing the packet receiver embodying the present invention;

FIG. 3 is a block diagram showing a speech transmission and receipt system including the packet receiver of FIG. 2;

FIG. 4 is a timing chart demonstrating the ideal receipt of consecutive packets;

FIG. 5 is a timing chart representative of the influence of the undesirable traffic of a packet communication network

on the storage of packets and reproduction of speech data;

FIG. 6 is a graph showing a relation between an optimum decode start point and the jitter distribution of the packet communication network;

5        FIG. 7 is a flowchart showing a specific operation of the illustrative embodiment;

FIG. 8 is a timing chart showing a relation between received packets sequentially stored in an input buffer included in the illustrative embodiment and reproduced speech data;

10       FIG. 9 is a view showing how the tail of the buffer differs in position from a case wherein the receipt buffer of a packet receiver is controlled to a case wherein it is not controlled;

FIG. 10 is a schematic block diagram showing an alternative embodiment of the present invention;

15       FIG. 11 is a timing chart showing a relation between received packets and reproduced speech data particular to the embodiment of FIG. 10;

FIG. 12 is a schematic block diagram showing another alternative embodiment of the present invention;

20       FIG. 13 is a schematic block diagram showing a specific configuration of a packet monitor included in the embodiment of FIG. 12;

FIG. 14 is a timing chart showing a relation between received packets and reproduced speech data particular to the embodiment of FIG. 12; and

25       FIG. 15 is a timing chart showing a relation between received packets and reproduced speech data that holds when the same received packets as the packets shown in FIG. 14 are applied to the embodiment of FIG. 2.

30

#### DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIG. 1 of the drawings, a buffer controller included in a packet receiver embodying the present invention is shown and generally designated by the reference numeral



10. In FIG. 1, structural elements not directly relevant to the understanding of the present invention are not shown. Signals are designated by reference numerals attached to signal lines on which they appear. As shown, the buffer controller  
5 10 is generally made up of a queue length detector 12, a decode start point setting circuit 14, a read comparator 16, and a read controller 18.

The queue length detector 12 performs real-time detection  
10 of the length of a queue that is formed by stored packets. The queue may contain packets other than received packets, e.g., error packets together with the received packets. The detector 12 receives address data representative of the positions of a buffer, which will be described specifically  
15 later, as well as other necessary data, although not shown specifically. A queue length, labeled QL, output from the detector 12 is zero at the beginning of communication, but increases as received packets are sequentially written to the buffer. The queue length QL is input to the read comparator  
20 16 and a diminishment control section 22b (see FIG. 2).

A decode start point or threshold 28, which will be described specifically later, is set in the decode start point setting circuit 14. In response, the setting circuit 14  
25 delivers a decode start point signal DP corresponding to the value of the decode start point 28 to the read comparator 16. The decode start point 28, of course, exists on the queue. To obviate jitter, the setting circuit 14 sets the decode start point 28 in accordance with traffic on a communication network  
30 not shown.

The read comparator 16 compares the value of the queue length QL and that of the decode start point signal DP. When the value of the queue length signal QL becomes greater than

the value of the decode start point signal DP, the read comparator 16 feeds a read command signal CR to the read controller 18.

5           The read controller 18 generates a control signal 18a for enabling an input buffer 22a (see FIG. 2) so as to control the read-out of the packets. More specifically, the read controller 18 delivers the control signal 18a to the input buffer 22a on receiving the read command signal CR and a read  
10   request signal RR. In response, the packets are sequentially read out of the input buffer 22a, one packet for one read request signal RR.

          In addition to the above-described control, the read  
15   controller 18 executes control for reading the packets out of the input buffer 22a without regard to the read command signal CR or the read request signal RR. Specifically, a switching decision circuit 220b, which will be described later, feeds a discard candidate read command signal DR representative  
20   of, among the stored packets, candidates to be discarded to the read controller 18. In response, the read controller 18 also delivers the control signal 18a to the input buffer 22a. In this case, the control signal 18a causes the input buffer 22a to select packets to be discarded. In response to the  
25   read request signal RR, the read controller 18 causes the packets selected to be read out of the input buffer 22a at a time. Packets are therefore read out of the input buffer 22a as if they were read out a plurality of times for a single reading period. This is successful to reduce a delay time.

30

FIG. 2 shows a packet receiver 20 embodying the present invention and including the buffer controller 10. As shown, the packet receiver 20 is generally made up of a receipt buffer section 22, a decoding circuit 24, and an output buffer 26.

The receipt buffer control section 22 includes the buffer controller 10, which is one of characteristic features of the present invention.

5           The receipt buffer section 22 includes the input buffer 22a and diminishment control section 22b in addition to the buffer controller 10. The input buffer 22a is implemented by a FIFO (First-In First-Out) memory for temporarily storing packets 42 sequentially received by the packet receiver 20.  
10   The input buffer 22a should only store coded and then packetized data. The FIFO memory may therefore be replaced with a semiconductor memory, flush memory or similar memory device so long as the designed processing speed of the packet receiver 20 lies in a desired range. As for the input buffer 22a, not  
15   only the previously mentioned decode start point 28, but also a diminishment start point or threshold 30 and, if necessary, a diminishment end point or threshold 32 are set.

20           The diminishment start point 30 is a point on the queue where a diminishing or thinning operation should begin. The diminishment end point 32 is a point on the queue where the diminishing operation should end. The received packets 42 read out of the input buffer 22a are fed to the previously mentioned switching decision circuit 220b and a switch 222b,  
25   which are included in the diminishment control section 22b, as received packets 44. A discard processor 224b is also included in the diminishment control section 22b.

30           The diminishment control section 22b may be implemented by either one of electric circuitry and software. When use is made of software, the decode start point 28, diminishment start point 30 and diminishment end point 32 may be set by use of an equation that will be described later.

00201T 2620760  
09703792 140200

The switching decision circuit 220b makes a decision on the switching of the switch 222b and controls the switching. Specifically, the queue length signal QL output from the queue length detector 12, a diminishment start point signal DS representative of the value of the diminishment start point 30 and a diminishment end point signal DE representative of the value of the diminishment end point 32 are input to the switching decision circuit 220b. The switching decision circuit 220b determines whether the received packets 44 should be discarded or decoded in accordance with the above input signals QL, DS and DE. The switching decision circuit 220b feeds a switching control signal 46 representative of the result of the decision to the switch 222b. A diminishment start point setting circuit, not shown, and a diminishment end point setting circuit, not shown, set the value of the diminishment start point 30 and that of the diminishment end point 32, respectively.

Further, when deciding whether or not to discard the received packets 44, the switching decision circuit 220b references, in addition to the signals QL, DS and DE, the audio contents of the coded speech data contained in the packets 44 that are read out of the input buffer 22a. Therefore, as a result of this decision, the packets 44 which would critically influence speech quality if discarded are decoded while the packets 44 which would influence it little are discarded. The switching decision circuit 220b may add the result of the decision to the individual packet in the form of bit information. It is to be noted that referencing the audio contents is not essential with the illustrative embodiment because the influence of jitter can be reduced without resorting to the reference.

The switch 222b has a terminal a to which the received

packets 44 are input. The switch 222b selects either one of terminals *b* and *c* in accordance with the switching control signal 46, thereby selecting the destination of the packets 44. The terminals *b* and *c* are connected to the discard processor 224b and decoding circuit 24, respectively. The switch 222b may select a destination in accordance with the bit information added to the individual packet by the switching decision circuit 220b, as stated earlier. In such a case, the signal line for feeding the switching control signal 46 is not necessary while the switch 222b functions in accordance with the bit information.

The discard processor 224b receives packets 48 via the switch 222b and discards them. Therefore, even when a packet loss occurs, the discard processor 224b prevents a speech from being continuously lost.

The decoding circuit 24 receives packets 50 via the switch 222b. The decoding circuit 24 includes a depacketizing circuit and a decoding circuit although not shown specifically. The depacketizing circuit depacketizes the packets 50 to thereby output speech data coded frame by frame. The decoding circuit decodes the coded speech data for thereby outputting the original speech data. As soon as the decoding circuit 24 fully decodes a packet 50 and becomes ready to decode the next packet 50, it delivers the previously mentioned read request signal RR to the buffer controller 10. Therefore, assuming that received packets have substantially the same length, then the decoding circuit 24 delivers the read request signals RR to the buffer controller 10 at substantially constant intervals in steady communication conditions. Consequently, the packets 44 are read out of the input buffer 22a at constant intervals.

00207 2620260

The illustrative embodiment is practicable with any one of conventional speech coding and decoding systems. For example, use may be made of linear PCM (Pulse Code Modulation), ITU-T (International Telecommunication Union-Telecommunication Standardization Sector) Recommendation G.711 (μ rule PCM),  
5 G.726 (ADPCM (Adaptive Differential PCM)), G723.1 or G.729 (CS-ACELP (Algebraic Code Excited Linear Prediction)) or CELP (Coded Excited Linear Prediction).

10 A decoding process depends on a coding process used by a packet transmitter. Tendency ascribable to a coding process will be outlined hereinafter. Each coding system provides a single frame with a particular duration. For example, the duration of a single frame is 10 milliseconds (0.01 second)  
15 in the G.729 coding system or 30 milliseconds (0.03 second) in the G.723.1 coding system. Further, the number of frames to be contained in a single packet, i.e., a packet size or a packet length is dependent on the apparatus used.

20 A plurality of frames containing coded speech data constitute a single packet. A header, i.e., information particular to a communication system is added to the packet. It follows that a small packet size successfully reduces the delay time, but requires a higher communication rate. On the  
25 other hand, a large packet size does not require a higher communication rate, but aggravates the influence of a packet loss and the delay time.

30 The output buffer 26 has a storing function similar to that of the input buffer 22a. Specifically, the output buffer 26 temporarily stores decoded speech data 52 sequentially output from the decoding circuit 24. The speech data 52 are read out of the output buffer 26 and fed via an output terminal 56 as speech data 54.

Reference will be made to FIG. 3 for describing a speech transmission and receipt system including the packet receiver 20 of the illustrative embodiment. As shown, the speech transmission and receipt system, generally 70, includes a packet transmitter 60, a packet communication network 80, and the packet receiver 20.

The packet transmitter 60 includes an input buffer 62, a coding circuit 64, and a transmission buffer 66. Speech data 72 are fed to the input buffer 62 via an input terminal 58. The input buffer 62 temporarily stores the speech data 72 and then delivers them to the coding circuit 64. The coding circuit 64 codes the speech data 72 frame by frame while feeding the resulting coded speech data 76 to the transmission buffer 66. The transmission buffer 66 not only stores speech data, but also serves part of a packetizing function under the control of a system controller, not shown, included in the packet transmitter 60. For example, the transmission buffer 66 stores consecutive frames until they coincide with the number of frames to be actually contained in a packet, and then adds header information to the individual frame, thereby packetizing the frames.

The packet transmitter 60 sends packets 78 output from the transmission buffer 66 to the packet receiver 20 via an output terminal 68 thereof and the packet communication network 80. The packet receiver 20 has the construction described with reference to FIG. 2.

A comparative packet transmission and receipt system will be described with reference to FIGS. 4 and 5. A packet receiver included in the comparative system lacks the buffer controller 10 of the illustrative embodiment although it is not shown specifically. Assume that traffic on the packet communication

network 80, FIG. 3, is in an ideal condition. Then, as shown in FIG. 4, (A), even the comparative system allows packets (frames) P1 through P8 sequentially output from a packet transmitter to be received by a packet receiver or receipt buffer at constant intervals without being lost. More specifically, the packets P1 through P8 arrive at the packet receiver during consecutive constant intervals T between times  $t_1$  through  $t_9$ . The packet receiver therefore sequentially decodes the received packets P1 through P8 and outputs a speech without any interruption or skip, as shown in FIG. 4, (B). However, it is rare that the packet communication network 80 is in an ideal condition during communication.

As shown in FIG. 5, (A), assume that the arrival of the third packet P3 at the receipt buffer is delayed due to heavy traffic on the packet communication network 80, and that the sixth packet is lost. More specifically, assume that the packets P1 and P2 arrive at the expected times  $t_1$  and  $t_2$ , respectively, but the packet P3 fails to arrive at the expected time  $t_3$ . Then, as shown in FIG. 5, (B), a memory location corresponding to the time  $t_3$  remains idle. The packet P3 is stored in the receipt buffer together with the packet P4 arrived at the expected time  $t_4$ . Thereafter, the packets P4 and P5 are sequentially stored in the receipt buffer up to the time  $t_5$ .

Let a delay of a received packet from an absolute receipt time or reproduction time be referred to as a delay. In the specific case shown in FIG. 5, the reproduction delay is ( $t_4 - t_3$ ). It will therefore be seen that at the time  $t_4$  the received packets P3 and P4 are sequentially read out in this order. When the buffer becomes idle, packets are accumulated. The accumulation of packets does not simply mean the idle condition of the buffer, but means that an idle location exists in the



buffer when data is requested. This idle state represented by the accumulation of packets will be referred to as a buffer idle state to occur when data is requested, in distinction from the substantially constant intervals T.

5

As shown in FIG. 5, (B), when the packets are decoded and output as a reproduced speech, the speech is interrupted between the times  $t_3$  and  $t_4$  while the delay thereof is aggravated. As shown in FIG. 5, (A), the packet P5 having just been received is allocated to the time  $t_6$  due to the packet loss occurred on the packet communication network 80. Subsequently, the packet P7 is stored at the time  $t_7$ . As a result, as shown in FIG. 5, (B), the speech data skips at the time  $t_7$  in the aspect of continuity. Although such a skip of speech data is not desirable, it cancels the past delay and allows speech data to be normally reproduced after the time  $t_7$ .

Hereinafter will be described some different principles unique to the illustrative embodiment. First, how the decode start point setting circuit 14 sets the decode start point or threshold 28 will be described. For example, when traffic on the packet communication network 80 is extremely light, consecutive packets are received at constant intervals, as stated earlier. In this condition, the decode start point 28 should only be set at a position spaced from the head of the input buffer 22a by one or two packets. Let a position close to the head of the input buffer 22a and a position far from the same be referred to as a shallow position (small value) and a deep position (large value), respectively.

So long as the jitter of received packets is zero because of the ideal condition of the packet communication network 80, the decode start point 28 may be set at the head of the

input buffer 22a, i.e., zero packet. When the jitter corresponds to one or two packets, the decode start point 28 can be set at a shallow position corresponding to one or two packets without making the input buffer 22a idle. If the input  
5 buffer 22a is not idle, the buffer idle state mentioned earlier does not occur when a data read request is generated.

In the illustrative embodiment, the position of the decode start point 28 is translated into time because the number of  
10 packets can be represented by a period of time. For example, assume that a single packet has five frames, and that the data length of a single frame corresponds to 0.01 second. Then, a period of time corresponding to a single packet is 0.05 second ( $= 0.01 \text{ second/frame} \times 5 \text{ frames/packet} \times 1 \text{ packet}$ ). Two packets  
15 correspond to 0.1 second, which is two times as long as 0.05 second. Therefore, the decode start point 28 corresponding to one or two packets is set at a position corresponding to 0.05 to 0.1 second. Stated another way, such a decode start point 28 prevents the packet receiver 20 from outputting a  
20 speech for 0.05 to 0.1 second since the start of communication, i.e., the arrival of a packet 42. This period of time does not include a period of time necessary for the processing of the output buffer 26 and other blocks.

When traffic on the packet communication network 80 is  
25 extremely heavy, the jitter of the individual received packet increases. In this case, should the decode start point 28 be shallow, the input buffer 22a would become idle and would bring about the previously mentioned idle buffer state,  
30 resulting in the interruption of a speech and therefore the degradation of speech quality. To solve this problem, the decode start point 28 should be set at a deep position spaced from the head of the input buffer 22a by five to ten packets.

09703792-110200

The time when a speech is actually output after the start of communication is more delayed as the position of the decode start point 28 becomes deeper. For example, when the decode start point 28 is set at the above-stated deep position, a speech will not be output for 0.25 to 1 second since the start of communication. This delay at the beginning of communication will be referred to as an initial delay. The initial delay is also one of delays and lowers communication quality. The decode start position 28 should therefore be set as shallow a position as possible at the beginning of communication.

The operation based on the decode start point 28 has the above-described characteristic. It is preferable to set the decode start point 28 on the basis of the width of a jitter distribution particular to the packet communication network 80. The width of a jitter distribution can be represented by a standard deviation  $\sigma$ . As shown in FIG. 6, the optimal range of decode start point 28 based on the width of a jitter distribution is between  $3\sigma$  and  $4\sigma$  in terms of standard deviation. In FIG. 6, the abscissa indicates the coefficient to be multiplied with the standard deviation  $\sigma$  while the right and left ordinates indicate the exhaustion ratio (%) of the input buffer 22a and a reproduction delay time (ms), respectively. The exhaustion ratio of the input buffer 22a refers to a ratio in which the idle buffer state occurs in the input buffer 22a. As shown in FIG. 6, a solid curve 82 representative of the exhaustion ratio is close to zero so long as the coefficient of the standard deviation  $\sigma$  is greater than  $3\sigma$ , but sharply increases as the coefficient  $\sigma$  decreases below  $3\sigma$ . A dash-and-dot curve 84 representative of the reproduction delay time remains substantially constant so long as the coefficient  $\sigma$  is smaller than  $4\sigma$ , but increases as the coefficient  $\sigma$  exceeds  $4\sigma$ .

The high exhaustion ratio of the input buffer 22a and the long reproduction delay time both deteriorate speech quality during communication. To insure high speech quality, both of such factors must be confined in sufficiently narrow ranges. It follows that the optimal range of from  $3\sigma$  to  $4\sigma$  successfully reduces the above two factors at the same time.

More specifically, assume that the jitter distribution of the packet communication network 80 has a standard deviation  $\sigma$  of 0.08 second. Then, the decode start point 28 may be set at 0.24 to 0.32 second. The buffer controller 10 does not read any received packet 44 out of the input buffer 22a from the above decode start point 28 to the point at which decoded data have been stored in the input buffer 22a by 0.24 to 0.32 second. During this period of time, no received packets are fed to the decoding circuit 24. With this scheme, it is possible to take a measure against jitter before the idle buffer state occurs. This is one of unprecedented features of the present invention.

Data diminishment, data thinning, executed against a packet loss together with the above-described measure against jitter will be described hereinafter. The diminishment start point 30, like the decode start point 28, is a point defined on a queue. Assume that the head of the input buffer 22a has a value PP while the decode start point 28, diminishment start point 30 and diminishment end point 32 have values 28P, 30P and 32P, respectively. Then, there holds a relation:

$$PP \leq 28P \leq 32P \leq 30P \quad \cdot \cdot \cdot (1)$$

The above relation (1) teaches that the diminishment start point 30 should be set at a position coincident with or deeper than the position of the decode start point 28. However, if

the position of the diminishment start point 30 is deep more than necessary, then the amount of data stored in the input buffer 22a, i.e., the length of a queue scarcely reaches the diminishment start point 30 and is apt to prevent the delay time from being reduced.

The diminishment end point 32 may be coincident with the diminishment start point 30 or the decode start point 28 or may intervene between the two points 28 and 30. Alternatively, the diminishment end point 32 may be set at a shallower position than the decode start point 28, although it is contrary to the relation (1).

A diminishing or thinning operation begins when the queue length reaches the diminishment start point 30. As a result, the amount of data stored in the input buffer 22a decreases up to the diminishment end point 32. If the diminishment end point 32 is set at a shallow position, then the input buffer 22a can cancel even a relatively long delay in a short period of time. However, such a position of the diminishment end point 32 is apt to make the input buffer 22a idle. A read request output from the decoding circuit 24 at this condition would bring about the idle buffer state described earlier, thereby interrupting a speech being reproduced.

Further, the shallow position of the diminishment end point 32 causes a speech being reproduced to skip. To obviate the skip of a speech, a buffer may be included in, e.g., the diminishment control section 22b for storing packets that should not be discarded, as determined by the switching decision circuit 220b. This is because at the time when the switching decision circuit 220b determines that a certain packet should not be discarded, the decoding circuit 24 may have not completed packet decoding. The above buffer, however, scales up the

hardware of the packet receiver.

5 The diminishment end point 32 is not essential because only if information relating to the size of a delay is input to the switching decision circuit 220b, the diminishing operation does not exceed the size of the actual delay, i.e., excessive diminishment is obviated. In the illustrative embodiment, the diminishment end point 32 is provided with the same value as the diminishment start point 30. This means  
10 that the delay that can be reduced by a single diminishment is limited to a time width corresponding to a single packet. This time width will sufficiently cope with the usual range of delays particular to the packet communication network 80.

15 In the illustrative embodiment, not only the diminishment end point 32 but also the decode start point 28 are coincident with the diminishment start point 30. A point CP where the three points 28, 30 and 32 are coincident lies in a range of from 3σ to 4σ. For example, the point CP may be set at 3.5σ.  
20 The point CP lying in such a range makes the occurrence that the input buffer 22a becomes idle least probable, and minimizes the delay at the same time.

25 When the queue length exceeds the single position CP where the three points 28, 30 and 32 are coincident, one packet is read out of the input buffer 22a. If the packet read out has critical influence on speech quality, then it should not be discarded, so that the delay cannot be diminished this time. The packet is therefore stored together with a packet to be  
30 received next. At the time of the next receipt, the queue length is apt to again exceed the diminishment start point 30 and cause the diminishing operation to be executed. At this time, the diminishing operation reduces or practically cancels the delay. In this manner, the diminishing operation

is repeated to maintain a normal state free from or substantially free from delays.

5 While the illustrative embodiment operates with both of the decode start point 28 and diminishment start point 30, either one of the two points 28 and 30 may be used, if desired.

10 The switching decision circuit 220b determines the degree of influence of each of the frames, which constitute a received packet, on speech quality. More specifically, in the illustrative embodiment, the switching decision circuit 220b executes a single diminishing operation with a single packet made up of a plurality of frames and determines whether or not to discard frame by frame. With this decision, it is possible to reduce a delay on a frame basis. The input buffer 22a and decoding circuit 24 each discard or decode data on a frame basis in place of a packet basis in accordance with the result of the decision.

20 A specific operation of the illustrative embodiment will be described with reference to FIG. 7. A flowchart shown in FIG. 7 is universal because it is adaptive to a case wherein the relation (1) does not hold, i.e., the three points 28, 30 and 32 are not coincident, or a case wherein although the three points are coincident, the packet length is not constant and makes it impractical to execute the discarding and decoding processing on a packet basis or a frame basis.

30 First, the speech transmission and receipt system 70 sends packets to the packet receiver 20 via the packet transmitter/receiver 60 and packet communication network 80. As shown in FIG. 7, the packet receiver 20 receives the packets while sequentially feeding them to the receipt buffer 22a via the input terminal 40 (step S10). The received packets 42

are sequentially stored in the input buffer 22a (step S12). Subsequently, decode start control is executed in accordance with whether or not the amount of data existing in the input buffer 22a has exceeded the decode start point 28 (step S14).  
5 Specifically, in the step S14, the read comparator 16 compares a detected queue length QL and the value of the decode start point 28. If the queue length QL is short of the decode start point 28 (NO, step S14), the operation returns to the step S10. If the queue length QL is greater than the value of the  
10 decode start point 28 (YES, step S14), the operation advances to diminishment control (step S16).

The decode start control (step S14) will be described more specifically with reference to FIG. 8, (A). As shown,  
15 at a time  $t_1$ , only a received packet P1 is stored in the input buffer 22a. At this instant, the queue length QL is short of the value of the decode start point 28, so that the packet P1 is not read out of the input buffer 22a. The next packet P2 expected to arrive at a time  $t_2$  does not arrived at the time  
20  $t_2$  due to a delay. The input buffer 22a therefore remains in the same condition at the times  $t_1$  and  $t_2$ .

At a time  $t_3$ , the packet P2 arrives at the packet receiver  
20 and is stored in the input buffer 22a while a packet P3 expected to be received at the time  $t_3$  has not arrived yet due to a delay. As a result, the queue length QL increases, but is still short of the decode start point 28, preventing the  
25 packets from being read out of the input buffer 22a. Although the decoding circuit 24 repeatedly sends the read request signal RR to the read controller 18 at the times  $t_1$  through  $t_3$ , the  
30 loop consisting of the steps S10 through S16 is repeated because the result of comparison does not satisfy the preselected condition. During this period of time, a speech shown in FIG. 8, (B), is not output.



At a time  $t_4$ , the packet P3 and a packet P4 are sequentially received and stored in the input buffer 22a. At this time, the queue length QL exceeds the decode start point 28, so that the read comparator 16 delivers the read command signal CR to the read controller 18. In response, the read controller 18 enables the input buffer 22a. Subsequently, in response to the read request signal RR, the read controller 18 reads the packet P1 stored in the input buffer 22a first out of the input buffer 22a. Even after the time  $t_4$ , successive received packets have been varied and delayed in various ways due to, e.g., varying traffic on the packet communication network 80. However, because the queue length QL of the input buffer 22a remains greater the value of the decode start point 28, the packet P2 and successive packets are sequentially read out of the input buffer 22a at the constant intervals T in response to the successive read request signals RR. Such a packet reading sequence implements universality.

Referring again to FIG. 7, if the answer of the step S14 is YES, the switching decision circuit 220b determines whether or not to effect diminishment on a packet basis in accordance with the queue length QL (step S16). At this instant, the switching decision circuit 220b additionally determines whether or not the traffic on the packet communication network 80 lies in a normal range. If the traffic lies in the normal range, the rate of extension of the queue length QL also lies in a normal range. In this case, the switching decision circuit 220b determines that diminishment is not necessary (NO, step S16), and causes the decoding operation to begin (step S18).

If traffic on the packet communication network 80 and therefore the queue length QL does not lie in the normal range, the switching decision circuit 220b determines that diminishment is necessary (YES, step S16). The switching decision circuit

220b then determines whether or not the packet (or the frame) to be diminished can be discarded (step S20). Assume that the rate of extension of the queue length QL sharply varies and exceeds the diminishment start point 30 represented by the diminishment start point signal DS. Then, the switching decision circuit 220b sends the discard candidate read command signal DR to the read controller 18. The packet read out in response to the signal DR is a candidate to be discarded.

In the step S18, the decoding circuit 24 performs processing inverse to coding with each frame of the received packet except for header information. The resulting reproduced speech data are output via the output buffer 26. This is followed by packet receipt (step S22) although decision processing is not shown specifically in FIG. 7; a received packet is stored in the input buffer (step S24). The step S24 is also followed by the step S16.

In the step S20, whether or not to discard the packet (or one frame of data) read out as a candidate is determined on the basis of the degree of auditory influence of the packet on speech quality, as stated earlier. If the packet has critical influence on speech quality, then it is not discarded (NO, step S20), but decoded (step S18); if otherwise (YES, step S20), the packet is discarded (step S26). More specifically, information indicative of whether the candidate is sound, medium sound or soundless is detected, and the candidate is discarded if it is soundless. Such information is included in, e.g., frame data generated by a soundless compressing function available with the G.723.1 coding system or the G.729 coding system, and facilitates the decision. When the frame data selected is discarded, a delay ascribable to the delays occurred on the packet communication network 80 can be smoothly reduced. Because frame data itself includes

a criterion for the decision, six soundless frames, for example, can be collectively discarded when occurring continuously.

Another specific procedure available for the above-described decision will be described hereinafter. Assume that  
5 frame data does not include the criterion for the decision. Then, the sound pressure level of a frame having just been decoded is calculated and then compared with a reference level. If the actual sound pressure level is lower than the reference  
10 level, the above frame is determined to be soundless. Then, a frame next to the soundless frame is discarded. Subsequently, a frame following the discarded frame is decoded. This specific procedure is derived from the fact that a sound pressure level generally does not suddenly change from a soundless level to  
15 a sound level. That is, a frame following a soundless frame can be safely considered to be also a soundless frame. For example, when six soundless frames occur continuously, three frames are discarded frame by frame.

20 After the above-described decision, the switching decision circuit 220b delivers the switching control signal 46 to the switch 222b. In response, the switch 222b selects the terminal *b* in the event of discarding or selects the terminal *c* in the event of decoding. Furthermore, while making the decision,  
25 the switching decision circuit 220b determines whether or not the queue length QL has reached the value of the diminishment end point 32, i.e., whether or not the diminishing operation has ended (step S28). If the answer of the step S28 is NO, the procedure returns to the step S20. If the answer of the  
30 step S28 is YES, the procedure advances to the step S18. As a result, the queue length QL becomes smaller than the value of the diminishment end point 32, so that the delay is reduced. As shown in FIG. 8, (B), the speech is continuously reproduced from the time  $t_4$  to a time  $t_9$ .

00207T" 264E0260

The procedure described with reference to FIG. 7 is only illustrative and may be changed or modified, as desired. For example, assume that the single position CP is set, and that the packet length to deal with is equal to the length of each received packet. Among the steps shown in FIG. 7, the loop consisting of the steps S16, S18, S22 and S24 should be executed every time a new packet is input to the input buffer 22a, and is therefore repeated a great number of times. By reducing the number of steps constituting the above loop or the number of times of repetition of the same loop, it is possible to reduce the amount of processing required of the program and the rate of execution of the program.

Specifically, in a specific modified procedure, the steps S10 through S14 shown in FIG. 7 are omitted. Also, the procedure begins at the step S22 in place of the step S16. In the modified procedure, too, whether a packet should be discarded or decoded is determined on the basis of the result of the decision made in the step S20. Further, the step S28 is also omissible because discharging one packet obviously makes the queue length QL smaller than the value of the common position CP. Specifically, when the queue length QL reaches the value of the single position CP, whether one packed read out should be discarded or coded may be determined on the basis of the result of the decision made on the diminishment start with the above packet. This completes one turn of the modified procedure. Because the packet is read out in response to the discard candidate read command signal DR, another packet can be read out in response to the read request signal RR during the interval T after the discarding of the above packet.

The simplified procedure described above may impair universality as to the sequence of packet receiving steps and may slightly lower the accuracy of control over the queue length

QL of the input buffer 22a. However, the simplified procedure noticeably simplifies the sequence of steps and therefore enhances rapid processing while reducing loads as to the processing ability.

5

In FIG. 9, parts (A) and (B), each plot the number of frames representative of a queue length, as counted at the tail of frames in the buffer, with respect to the time elapsed since the beginning of communication. The relations shown in FIG. 9, parts (A) and (B), were observed when the diminishing operation was not effected and when it was effected, respectively. As for the diminishing operation, both the diminishment start point DS and diminishment end point DE were set at the point CP that was selected to be twenty-eight frames. Twenty-eight frames lies in the previously mentioned range of from 30 to 40. It will be seen that the queue length QL shown in FIG. 9, (B), stably varies at shorter positions than the queue length QL shown in FIG. 9, (A). Although the idle buffer state, in which the queue length QL is a zero frame, occurs more frequency in FIG. 9, (B), than in FIG. 9, (A), such an idle buffer state is not always the idle buffer state occurring when a read request is generated. What is important to note is that the variation of the queue length QL is controllable in accordance with the contents of the diminishing operations, such as the diminishment start point and the diminishment end point.

By so effecting the diminishing operation, the queue length QL is stabilized at shallow positions at the tail of the data stored in the input buffer 22a. This means that a waiting time up to the decoding of a received packet and therefore a delay is reduced. When the idle buffer state is likely to occur in the presence of a read request due to, e.g., a packet loss, an error frame imitating the information of a frame having

just been decoded may preferably be fed to the decoding circuit 24. This is also successful to reduce the interruption of a reproduced speech and therefore to improve speech quality.

5           The function using the decode start point absorbs jitter derived from packet delay, which is ascribable to, e.g., the packet communication network 80, and thereby allows a speech to be reproduced without any interruption. The diminishing operation not only reduces a delay, but also prevents a speech  
10       from skipping while maintaining speech quality. In addition, because a minimum of additional software suffices to implement the control using the decode start point and diminishment start point, the control scarcely effects the amount of calculations, calculation speed, and cost performance. Moreover, only one  
15       time of comparison implemented by software suffices to execute the control over the start of decoding and diminishing operation, obviating the need for additional calculations or costs. Also, the control over the start of decoding and diminishing operation are practicable without resorting to  
20       allocation and other wasteful steps otherwise required to grasp delay times and reduce delays.

Referring to FIG. 10, an alternative embodiment of the present invention will be described. In FIGS. 2 and 10,  
25       identical structural elements are designated by identical reference numerals and will not be described specifically in order to avoid redundancy. As shown, the packet receiver 20 shown in FIG. 10 additionally includes a weak noise data generator 22c. The weak noise data generator 22c is included  
30       in the receipt buffer 22 and connected to the input of the input buffer 22a. The weak noise data generator 22c is a memory storing weak noise data referred to as dummy frames. After a power switch, not shown, included in the packet receiver 20 has been turned on or after the end of communication, the

weak noise data generator 22c outputs the dummy frames in such a manner as to fill up a gap between the head of the input buffer 22a and the decode start point 28.

5           As shown in FIG. 11 specifically, the dummy frames fed from the weak noise data generator 22c and received packets form a queue in the input buffer 22a. As shown, after the turn-on of the power switch of the packet receiver or after the end of the previous communication, the dummy frames are  
10 stored in the input buffer 22a up to the decode start point 28 at at least the time  $t_1$ . For example, at a time  $t_0$  when the next communication begins, three dummy frames DM1 through DM3 have already been stored in the input buffer 22a. Such dummy frames are also input to the input buffer 22a at  
15 preselected intervals even after the time  $t_1$  such that the sum of the dummy frames and the received packets does not decrease below the decode start point 28 (see FIG. 11). The dummy data constituting dummy frames may be identical with each other. The weak noise data implementing dummy frames may be replaced  
20 with any other sound data, if desired.

In operation, at the beginning of communication, the decoding circuit 24 sends a read request signal RR to the read controller 18. In response, the read controller 18 causes  
25 the dummy frames DM1 through DM3 to be read out of the weak noise data generator 22c in this order and decoded; the dummy frame DM1 is positioned at the head of the queue. As a result, weak noise is input to the decoding circuit 24 without regard to traffic on the packet communication network 80 up to the  
30 time when the received packet P1 is decoded, i.e., from the time  $t_1$  to the time  $t_4$ . With the weak noise, the packet receiver 20 is capable of reducing the influence of the initial delay on the communication and notifying the user of the start of communication. This embodiment is therefore advantageous over

the previous embodiment in that it prevents the user from feeling uneasy.

Furthermore, if the dummy frames are stored in the input  
5 buffer 22a up to the decode start point 28 at at least the  
time  $t_1$ , the illustrative embodiment can surely start reproducing  
speech data at the time  $t_4$  despite any delay of the following  
received packets P2 and P3. The position for surely starting  
10 reproducing speech data is variable on the basis of the position  
of the decode start point 28 because the position of  
reproduction corresponds to the position of the decode start  
point 28. In this manner, even when traffic on the packet  
communication network 80 is heavy, the dummy frames stored  
15 in the input buffer 22a allow the packet receiver 20 to reduce  
the initial delay more than in the previous embodiment. Stated  
another way, the initial delay varies each time of communication  
in the previous embodiment, but remains stable and is shorter  
in this embodiment. This embodiment is, of course, capable  
of absorbing jitter like the previous embodiment.

Another alternative embodiment of the present invention  
will be described with reference to FIG. 12. In FIGS. 2 and  
12, identical structural elements are designated by identical  
reference numerals and will not be described specifically in  
25 order to avoid redundancy. As shown, the illustrative  
embodiment additionally includes a packet monitor circuit 29  
connected to the input of the input buffer 22a. The packet  
monitor circuit 29 feeds a packet signal 42A to the input buffer  
22a in accordance with the result of monitoring.

As shown in FIG. 13 specifically, the packet monitor  
circuit 29 is generally made up of a time-out monitor 280,  
a sequence monitor 282, an error packet generator 284, and  
a packet discarding circuit 286. The blocks 280 through 286



may each be implemented as a single unit. Either one of the time-out monitor 280 and sequence monitor 282 may be omitted, if desired.

5           The time-out monitor 280 has a timepiece function and a function of monitoring the receipt of packets. Specifically, the time-out monitor 280 calculates a time at which a preselected period of time expires, and counts a period of time expired since the start of communication or an interval  
10       between the communication start time and the current time with the timepiece function. The above preselected period of time (time-out time hereinafter) is set in the time-out monitor 280 and representative of a delay time that is allowable in a jitter-free condition. The time-out time is therefore the  
15       sum of the expected time at which a packet should arrive and the above preselected period of time.

          As for the function of monitoring the receipt of packets, the time-out monitor 280 determines whether or not a packet  
20       has arrived within a time-out time assigned thereto. When the time-out monitor 280 detects the time-out of a certain packet, it delivers a time-out error signal TE to the error packet generator 284 and packet discarding circuit 286. A packet loss is also causative of the time-out of a packet.

25           Assuming that the time-out time is  $S_n$  in the absence of jitter is  $S_n$ , then the time-out time  $S_n$  is expressed as:

$$S_n = n \cdot f \cdot t \quad \cdot \cdot \cdot (2)$$

30       where  $n$  denotes the  $n$ -th received packet,  $f$  denotes a packet size, and  $t$  denotes the duration of a single frame or one frame time.

09703792 110200

The sequence monitor 282 determines whether or not a packet received via the packet communication network 80 is correct in the sequence of receipt. If the sequence of receipt is not correct, the sequence monitor 282 feeds a sequence error signal SE to the error packet generator 284 and packet discarding circuit 286. The sequence monitor 282 may also have a timepiece function, if necessary. A sequence error may also occur when the sequence of packets is inverted or a packet loss occurs during transfer via the packet transfer network 80.

The error packet generator 284 generates an error packet in response to a generation command and inserts the error packet in the position of a packet where an error has occurred. The error packet is a single packet of frames storing the same weak noise data or similar speech data as the dummy data constituting the dummy frames. The queue therefore includes such error packets also.

The packet discarding circuit 286 discards a packet received via the packet communication network 80 and corresponding to the inserted error packet.

One or both of the time-out monitor 280 and sequence monitor 282 included in the packet monitor circuit 29 detect a receipt error. For example, when a packet loss occurs in a certain received packet, the packet is not received within a preselected time-out time with the result that the time-out monitor 280 outputs the time-out error signal TE. At the same time, a packet expected to follow the above packet is input to the sequence monitor 282, skipping the expected packet. As a result, the sequence monitor 282 outputs the sequence error signal SE. In this manner, it is likely that the error signals TE and SE are output at the same time. In such a case,

to prevent two error packets from being generated at the same time, the error packet generator 284 should preferably generate an error packet in response to the error signal TE or SE input thereto first while neglecting the error signal input later.

5

The packet monitor circuit 29 identifies the individual packet fed when its structural elements are operating normally. For the identification, the packet monitor circuit 29 uses packet identification information representative of, e.g.,  
10 a sequence number or packet number or the time of generation or the transmission of a packet (time stamp information) added to the individual packet by the packet transmitter 60.

To monitor packets as to a packet loss and the inversion of the sequence of arrival, the packet monitor circuit 29 may use any desired kind of information, including the packet number, time-out time and time stamp information, so long as it can monitor packets. Even unique information may be added to the individual packet. Typical of unique information are  
20 a sequence number particular to TCP/IP (Transmission Control Protocol/Internet Protocol) and a sequence number and a time stamp particular to UDP/IP (User Datagram Protocol/Internet Protocol).

More specifically, when the sequence number of a given received packet is not coincident with the sum of the sequence number of a received packet preceding it and 1 (one), the packet monitor circuit 29 determines that a packet loss has occurred or that the sequence of arrival has been inverted. Further,  
30 when the time stamp of a received packet and that of a received packet preceding it are, e.g., 16 h 40 m and 16 h 52 m, respectively, then the packet monitor circuit 29 determines that the packets were received in the inverse sequence.

09703792 110200

The operation of the packet monitor circuit 29 will be described more specifically with reference to FIGS. 14, (A) and (B). At the same time as the packet receiver 20 starts communication, the packet monitor circuit 29 starts operating. As shown in FIG. 14, (A), assume that the packet P4 is received just after the packet P2. Then, the sequence monitor 282 detects a sequence error ascribable to a packet loss and feeds the sequence error signal SE to the error packet generator 284. In response, the error packet generator 284 inputs an error packet D3 to the input buffer D3 at the time  $t_3$ . That is, the packet P2 is stored in the input buffer 22a at the time  $t_2$ , and the error packet D3 is stored over the packet P2. At the time  $t_3$  therefore, the error packet D3 forms the tail of the queue, as shown in FIG. 14, (A).

The packet monitor circuit 29, preceding the input buffer 22a and monitoring packets at high speed, inputs the error packet D3 in the input buffer 22a before it receives the packet P4. The error packet D3 is input to the input buffer 22a without regard to the existing queue length. This is contrastive to the storage of the dummy frame DM of the previous embodiment in the input buffer 22a. Assume that the error packet D3 is not input to the input buffer 22a at the time  $t_3$ , and the packet P2 is read out later, making the input buffer 22a idle. Then, the idle buffer state occurs when the read request signal RR appears. The error packet D3 successfully obviates such an occurrence.

Subsequently, the packet monitor circuit 29 detects a packet loss at the time  $t_5$  and then inputs the error packet D5 in the input buffer 22a at the time  $t_6$ . The packet P6 is delayed and fed before the time-out time, so that the error packet D6 is not generated or inserted due to the absence of the error signals TE and SE. The packet P6 does not arrive

at the time  $t_6$ , but is stored in the input buffer 22a together with the next packet P7 at the time  $t_7$ . The packets P6 and P7 are therefore sequentially read out of the input buffer 22a in this order.

5

As shown in FIG. 14, (B), the error packets D3 and D5 inserted in place of the lost packets P3 and P5, respectively, complete a continuous train of speech data P1, P2, D3, P4, D5, P6 and P7. Consequently, despite packet losses and delays actually occurring, the speech data are reproduced with expected speech quality while causing the user to feel a minimum of skip or interruption.

For comparison, FIGS. 15, (A) and (B), demonstrate the reproduction of speech data available with the embodiment of FIG. 2 under the occurrence of packet losses and packet delays. The embodiment of FIG. 2 lacks the packet monitor circuit 29. As shown in FIG. 15, (A), the error packet D3 is not input to the input buffer 22a between the times  $t_3$  and  $t_4$  with the result that the idle buffer state occurs when a read request appears. Consequently, as shown in FIG. 15, (B), a skip occurs between the packets P2 and P4. Moreover, because the packet P5 is lost, the speech is interrupted over the substantial interval between the times  $t_5$  and  $t_7$  due to the absence of data. For packets fed in the same conditions, this embodiment can reproduce more smooth speech data than the embodiment of FIG. 2 and can reduce the frequency of the idle buffer state. The packet monitor circuit 29 can, of course, be applied to the embodiment of FIG. 10.

30

As stated above, the illustrative embodiment reduces not only jitter, but also the influence of the skip and interruption of a speech ascribable to data losses and/or data delays, thereby providing the final speech output with optimal quality.

The embodiments shown and described each obviate the interruption and the skip of a speech ascribable to jitter and a packet loss, respectively, before an idle buffer state ascribable to a data delay, particularly a buffer idle state likely to occur when a read request is generated, occurs. For this purpose, the embodiments give accurate consideration to the jitter distribution of a communication network. The embodiments achieve this advantage without increasing the scale or the cost of a packet receiver.

Further, just after the power-up of the packet receiver or after the end of communication, dummy data are fed in consideration of a decode start point and stored in an input buffer beforehand. This successfully reduces the initial delay and provides the user of a packet receiver with serves while freeing the user from uneasiness. Moreover, the receipt of packets is monitored in order to feed error packets in place of abnormal received packets, so that the skip of a speech ascribable to data losses and the relatively long interruption of a speech are obviated.

In summary, it will be seen that the present invention provides a packet receiver capable of reducing the influence of the jitter of a communication network on speech quality. For this purpose, the packet receiver starts reading packets out of packet storing means when the length of a queue reaches a preselected threshold assigned to read-out. Further, the packet receiver of the present invention reduces the influence of delays of packets by executing discard processing with the queue every time the queue length reaches another threshold assigned to discarding.

The entire disclosure of Japanese patent application No. 2000-85744 filed March 27, 2000 including the specification,

claims, accompanying drawings and abstract of the disclosure is incorporated herein by reference in its entirety.

While the present invention has been described with  
5 reference to the illustrative embodiments, it is not to be  
restricted by the embodiments. It is to be appreciated that  
those skilled in the art can change or modify the embodiments  
without departing from the scope and spirit of the present  
invention.

WHAT IS CLAIMED IS:

1. A packet receiver connected to a network for receiving communication packets sent from a packet transmitter and containing coded speech data via said network, decoding said communication packets, and outputting decoded speech data, said packet receiver comprising:

a packet memory circuit for temporarily storing received packets including the communication packets in a first-in first-out fashion to thereby form a queue;

a read start threshold setting circuit for setting, with respect to a length of the queue, a read start threshold at which the received packets should begin to be read out;

a read comparing circuit for determining whether or not the length of the queue has reached said read start threshold, and outputting a read command signal in accordance with a result of a decision; and

a read control circuit for causing, in response to said read command signal, the received packets to be read out of said packet memory circuit.

2. A packet receiver in accordance with claim 1, further comprising a dummy memory circuit storing a dummy packet containing exclusive speech data, wherein before a new receipt of the communication packets, said dummy memory circuit feeds said dummy packet to said packet memory circuit.

3. A packet receiver in accordance with claim 1, wherein by using a standard deviation that reflects a jitter distribution of the network and causes a receipt time of the communication packet to vary, said read start point setting circuit sets the read start threshold at a length of the queue that is three times to four times as great as said standard deviation.



4. A packet receiver in accordance with 1, further comprising a diminishment control circuit for setting, with respect to the length of the queue, a discard start threshold and a discard end threshold at which the received packets should  
5 begin to be discarded and should end to be discarded, respectively, designating, when the length of said queue exceeds said discard start threshold, a received packet to be read out as a candidate to be discarded, estimating, based on sound/soundless information contained in said packet designated  
10 and the queue and/or an influence of said packet on quality of sound to be reproduced in an auditory aspect, and discarding or decoding said packet in accordance with a result of an estimation.

5. A packet receiver in accordance with claim 4, wherein said diminishment control circuit comprises:

a switching decision circuit for generating, when the length of the queue exceeds said discard start threshold, a  
5 signal to said read control circuit for reading the packet designated out of said packet memory circuit as the candidate, estimating the influence of said packet on sound quality, and generating a switching signal for selecting either one of discard processing and decode processing;

10 a switch for selecting the discard processing or the decode processing in accordance with said switching signal; and

a discarding circuit for executing the discard processing to thereby discard the received packet input via said switch;

15 said switching decision circuit causing said switch to continuously select the discard processing up to said discharge end threshold set on the queue.

6. A packet receiver in accordance with claim 5, wherein said read start threshold, said discard start threshold and said discard end threshold are identical with each other.

002071 262ED/60

7. A packet receiver in accordance with claim 1, further comprising a packet monitoring circuit for monitoring the communication packets being sequentially received via the network and discarding, when any one of said communication  
5 packets exceeds a preselected allowable delay and/or is received in an inverse sequence, the one packet and/or feeding a preselected error packet to said packet memory circuit.

8. A packet receiver in accordance with claim 7, wherein said packet monitoring circuit comprises:

a time-out monitoring circuit for assigning a particular receipt limit time representative of the preselected allowable  
5 delay to each communication packet, and determining whether or not each communication packet arrives before said receipt limit time assigned thereto expires;

a sequence monitoring circuit for monitoring a sequence of receipt of the communication packets on the basis of  
10 information contained in said communication packets;

a discarding circuit for monitoring the communication packets and discarding any one of said communication packets that has arrived after the receipt limit time assigned to thereto; and

15 an error compensating circuit for feeding, when any one of the communication packets is discarded or received in an inverse sequence, the error packet to said packet memory circuit.

9. A packet receiver in accordance with claim 2, wherein by using a standard deviation that reflects a jitter distribution of the network and causes a receipt time of the communication packet to vary, said read start threshold setting  
5 circuit sets the read start threshold at a length of the queue that is three times to four times grater as great as said standard deviation.

10. A packet receiver in accordance with 9, further comprising a diminishment control circuit for setting, with respect to the length of the queue, a discard start threshold and a discard end threshold at which the received packets should  
5 begin to be discarded and should end to be discarded, respectively, designating, when the length of said queue exceeds said discard start threshold, a received packet to be read out as a candidate to be discarded, estimating, based on sound/soundless information contained in said packet designated  
10 and the queue, an influence of said packet on sound quality of sound to be reproduced in an auditory aspect, and discarding or decoding said packet in accordance with a result of an estimation.

11. A packet receiver in accordance with claim 10, wherein said diminishment control circuit comprises:

5 a switching decision circuit for generating, when the length of the queue exceeds said discard start threshold, a signal to said read control circuit for reading the packet designated out of said packet memory circuit as the candidate, estimating the influence of said packet on sound quality, and generating a switching signal for selecting either one of discard processing and decode processing;

10 a switch for selecting the discard processing or the decode processing in accordance with said switching signal; and

a discarding circuit for executing the discard processing to thereby discard the received packet input via said switch;

15 said switching decision circuit causing said switch to continuously select the discard processing up to said discharge end threshold set on the queue.

12. A packet receiver in accordance with claim 11, wherein said read start threshold, said discard start threshold and

said discard end threshold are identical with each other.

13. A packet receiver in accordance with claim 12, further comprising a packet monitoring circuit for monitoring communication packets being sequentially received via the network and discarding, when any one of said communication packets exceeds a preselected allowable delay and/or is received in an inverse sequence, the one packet and/or feeding a preselected error packet to said packet memory circuit.

14. A packet receiver in accordance with claim 13, wherein said packet monitoring circuit comprises:

a time-out monitoring circuit for setting a particular receipt limit time representative of the preselected allowable delay to each communication packet, and determining whether or not each communication packet arrives before said receipt limit time assigned thereto expires;

a sequence monitoring circuit for monitoring a sequence of receipt of the communication packets on the basis of information contained in said communication packets;

a discarding circuit for monitoring the communication packets and discarding any one of said communication packets that has arrived after the receipt limit time assigned to thereto; and

an error compensating circuit for feeding, when any one of the communication packets is discarded or received in an inverse sequence, the error packet to said packet memory circuit.

15. A method of receiving communication packets sent from a packet transmitter via a communication network and containing coded speech data via said network, decoding said communication packets, and outputting decoded speech data, said method comprising:

09703792-110200  
a first step of setting, before temporarily storing received packets including the communication packets to thereby form a queue, a read start threshold at which said received packets should begin to be read out, a discard start threshold at which said received packets should begin to be discarded, and a discard end threshold at which said received packets should end to be discarded with respect to a length of said queue;

a second step of temporarily storing the received packets to thereby form the queue;

a third step of comparing the queue with said read start threshold and outputting, in accordance with a result of a comparison, a read command signal for reading out the received packets;

a fourth step of reading out the received packets in response to said read command signal and either one of a read request signal requesting the received packets to be decoded and a discard candidate read command signal output when the queue reaches said discard start threshold;

a fifth step of selecting either one of discarding and decoding of the received packets read out;

a sixth step of discarding, when the discarding is selected, at least one of the received packets from a head of the queue while determining whether or not the length of the queue has reached said discard end threshold; and

a seventh step of decoding, when the decoding is selected, the received packet read out.

16. A method in accordance with claim 15, wherein said read start threshold, said discard start threshold and said discard end threshold are identical with each other.

17. A method in accordance with claim 15, wherein said fifth step comprises designating, in response to said candidate

5 read command signal, the received packet read out as a candidate to be discarded, and estimating, based on sound/soundless information contained in said packet designated and the queue and/or an influence of said packet on sound quality of sound to be reproduced in an auditory aspect, and discarding or decoding said packet in accordance with a result of an estimation.

18. A method in accordance with claim 15, before a new receipt of the communication packet, a dummy packet containing exclusive speech data is fed and stored.

5 19. A method in accordance with claim 15, further comprising an eighth step of discarding, when any one of communication packets sequentially received via the network and monitored exceeds a preselected allowable delay and/or is received in an inverse sequence, the one communication packet and/or feeding a preselected error packet.

20. A method in accordance with claim 19, wherein said eighth step comprises:

5 a step of assigning a particular receipt limit time representative of the preselected allowable delay to each communication packet, and determining whether or not each communication packet arrives before said receipt limit time assigned thereto expires;

10 a step of monitoring a sequence of receipt of the communication packets on the basis of information contained in said communication packets;

a step of monitoring the communication packets and discarding any one of said communication packets that has arrived after the receipt limit time assigned to thereto; and

15 a step of feeding, when any one of the communication packets is discarded or received in an inverse sequence, the

Table 1. Demographic and Clinical Characteristics of the Study Population	
Age (mean $\pm$ SD)	65.2 $\pm$ 12.5
Gender (Male/Female)	120/80
Education (years)	12.5 $\pm$ 2.1
Marital Status (Married/Divorced/Widowed)	150/30/20
Occupation (Professional/Retired/Unemployed)	80/40/20
Comorbidities (Hypertension/Diabetes/Cholesterol)	100/50/30
Medication (Antidepressants/Anxiolytics)	120/40
Duration of Illness (years)	5.2 $\pm$ 3.1
Severity of Illness (Mild/Moderate/Severe)	40/60/20
Family History (Depression/Anxiety)	30/20
Stressors (Work/Family/Health)	100/50/30
Support System (Family/Friends/Community)	120/40/20
Quality of Life (SF-36 Score)	45.2 $\pm$ 15.1
Healthcare Utilization (Primary Care/Specialty Care)	100/20
Insurance Status (Medicaid/Medicare/Private)	80/40/20
Geographic Location (Urban/Rural)	100/20
Season of Onset (Spring/Summer/Autumn/Winter)	30/30/30/30
Time of Onset (Morning/Afternoon/Evening/Night)	40/40/40/20
Duration of Episode (days)	10.2 $\pm$ 5.1
Recovery Time (weeks)	8.5 $\pm$ 3.2
Recurrence Rate (%)	15.2
Overall Health Status (Good/Fair/Poor)	80/40/20
Life Satisfaction (Scale 1-10)	6.5 $\pm$ 2.1
Future Outlook (Optimistic/Pessimistic)	60/40
Adherence to Treatment (%)	85.2
Healthcare Costs (\$1000s)	12.5 $\pm$ 4.1
Healthcare Access (Easy/Difficult)	80/20
Healthcare Satisfaction (Scale 1-10)	7.2 $\pm$ 1.5
Healthcare Utilization (Emergency Room/Hospital/Outpatient)	20/10/70
Healthcare Costs (Outpatient/Inpatient)	10/2
Healthcare Access (Distance/Time)	10/10
Healthcare Satisfaction (Provider/Staff)	8/8
Healthcare Utilization (Preventive Care)	10
Healthcare Costs (Preventive Care)	1
Healthcare Access (Preventive Care)	10
Healthcare Satisfaction (Preventive Care)	8
Healthcare Utilization (Mental Health Services)	10
Healthcare Costs (Mental Health Services)	1
Healthcare Access (Mental Health Services)	10
Healthcare Satisfaction (Mental Health Services)	8
Healthcare Utilization (Substance Abuse Services)	10
Healthcare Costs (Substance Abuse Services)	1
Healthcare Access (Substance Abuse Services)	10
Healthcare Satisfaction (Substance Abuse Services)	8
Healthcare Utilization (Addiction Services)	10
Healthcare Costs (Addiction Services)	1
Healthcare Access (Addiction Services)	10
Healthcare Satisfaction (Addiction Services)	8
Healthcare Utilization (Behavioral Health Services)	10
Healthcare Costs (Behavioral Health Services)	1
Healthcare Access (Behavioral Health Services)	10
Healthcare Satisfaction (Behavioral Health Services)	8
Healthcare Utilization (Mental Health Services)	10
Healthcare Costs (Mental Health Services)	1
Healthcare Access (Mental Health Services)	10
Healthcare Satisfaction (Mental Health Services)	8
Healthcare Utilization (Substance Abuse Services)	10
Healthcare Costs (Substance Abuse Services)	1
Healthcare Access (Substance Abuse Services)	10
Healthcare Satisfaction (Substance Abuse Services)	8
Healthcare Utilization (Addiction Services)	10
Healthcare Costs (Addiction Services)	1
Healthcare Access (Addiction Services)	10
Healthcare Satisfaction (Addiction Services)	8
Healthcare Utilization (Behavioral Health Services)	10
Healthcare Costs (Behavioral Health Services)	1
Healthcare Access (Behavioral Health Services)	10
Healthcare Satisfaction (Behavioral Health Services)	8

ABSTRACT OF THE DISCLOSURE

A packet receiver includes a packet memory circuit for temporarily storing received packets in a FIFO (First-In First-Out) fashion in the form of a queue. A read start threshold setting circuit sets, with respect to the length of the queue, a read start threshold at which the received packets should begin to be read out. A read comparing circuit determines whether or not the length of the queue has reached the read start threshold, and outputs a read command signal in accordance with the result of decision. In response to the read command signal, a read control circuit causes the received packets to be read out of the packet memory circuit. The packet receiver reduces the influence of the jitter of a communication network on speech quality. Also, the packet receiver reduces the influence of delays of packets by executing discard processing with the queue.



Fig. 1

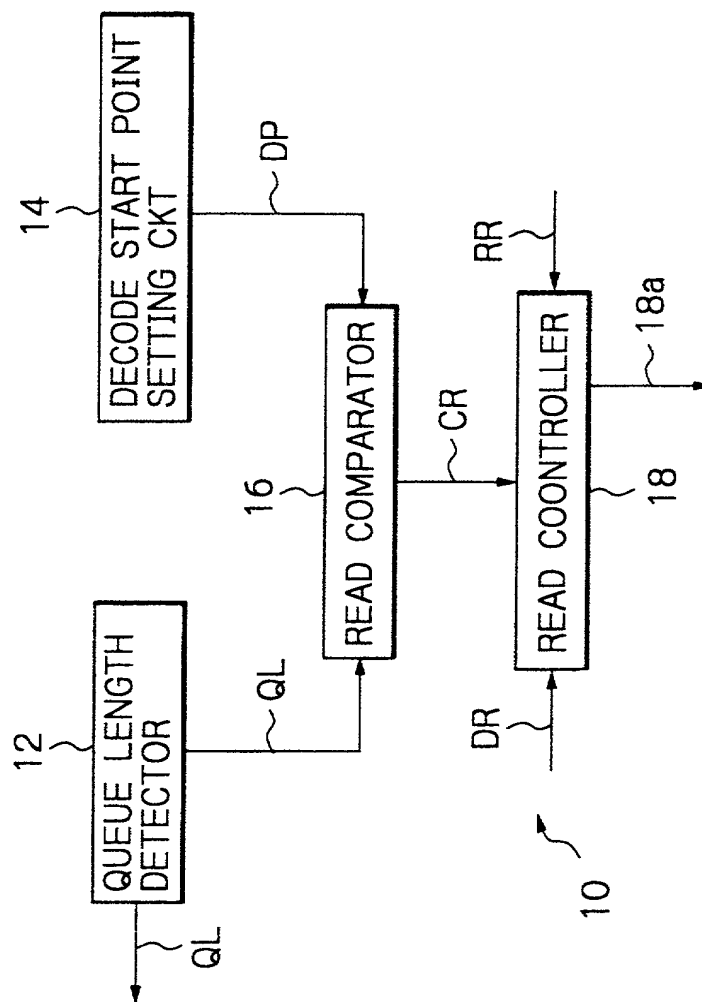


Fig. 2

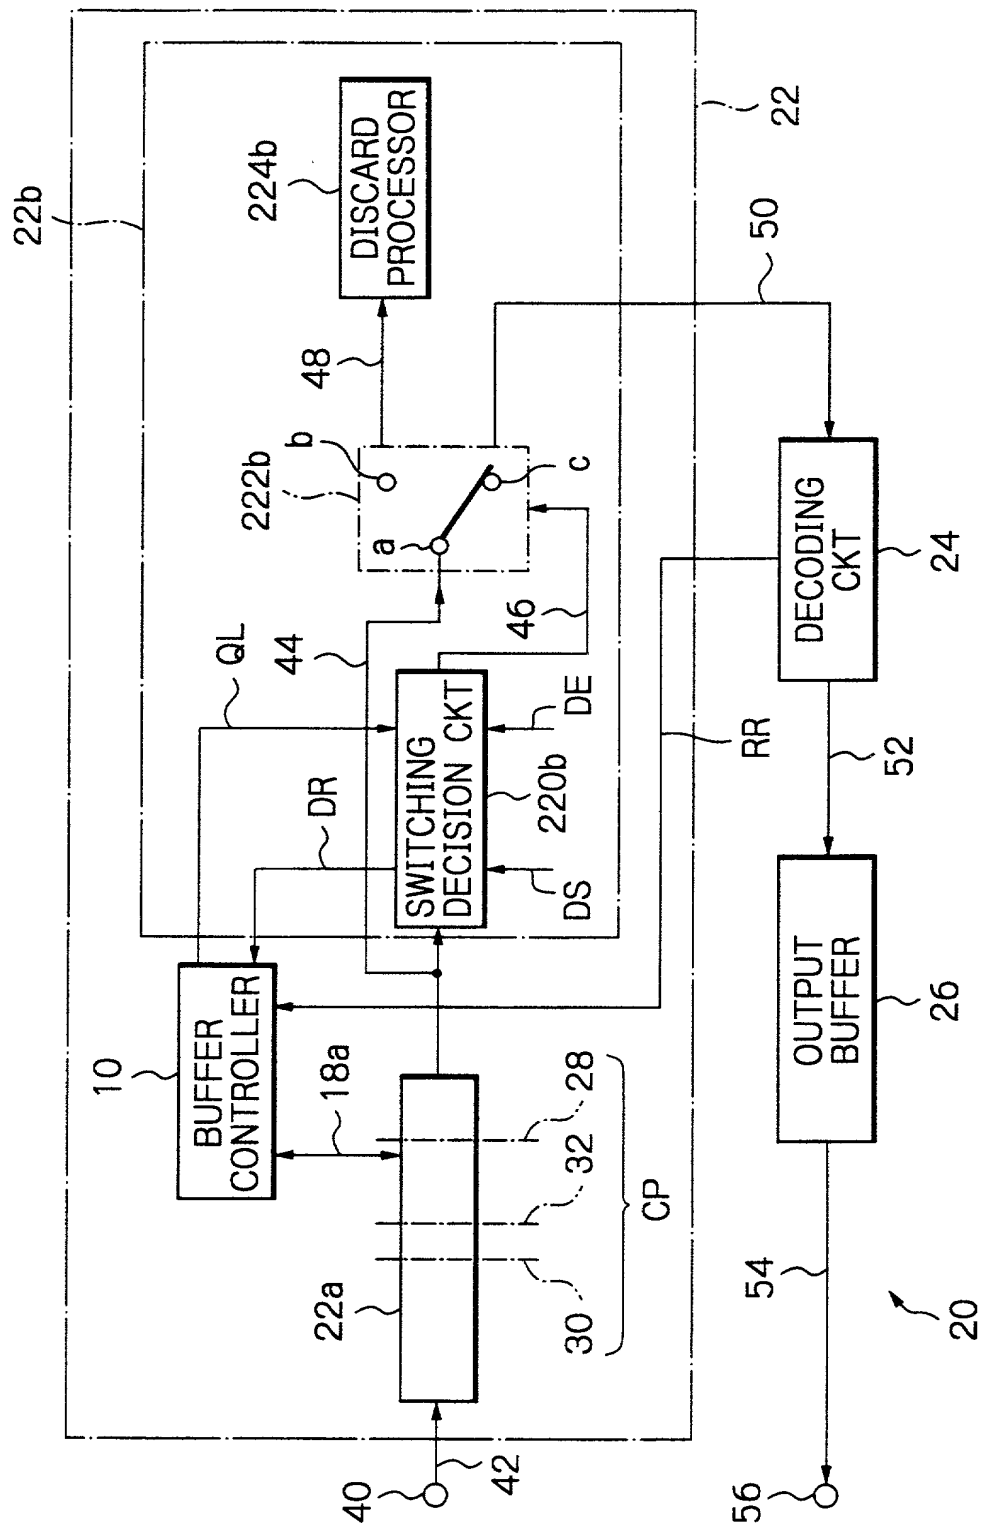


Fig. 3

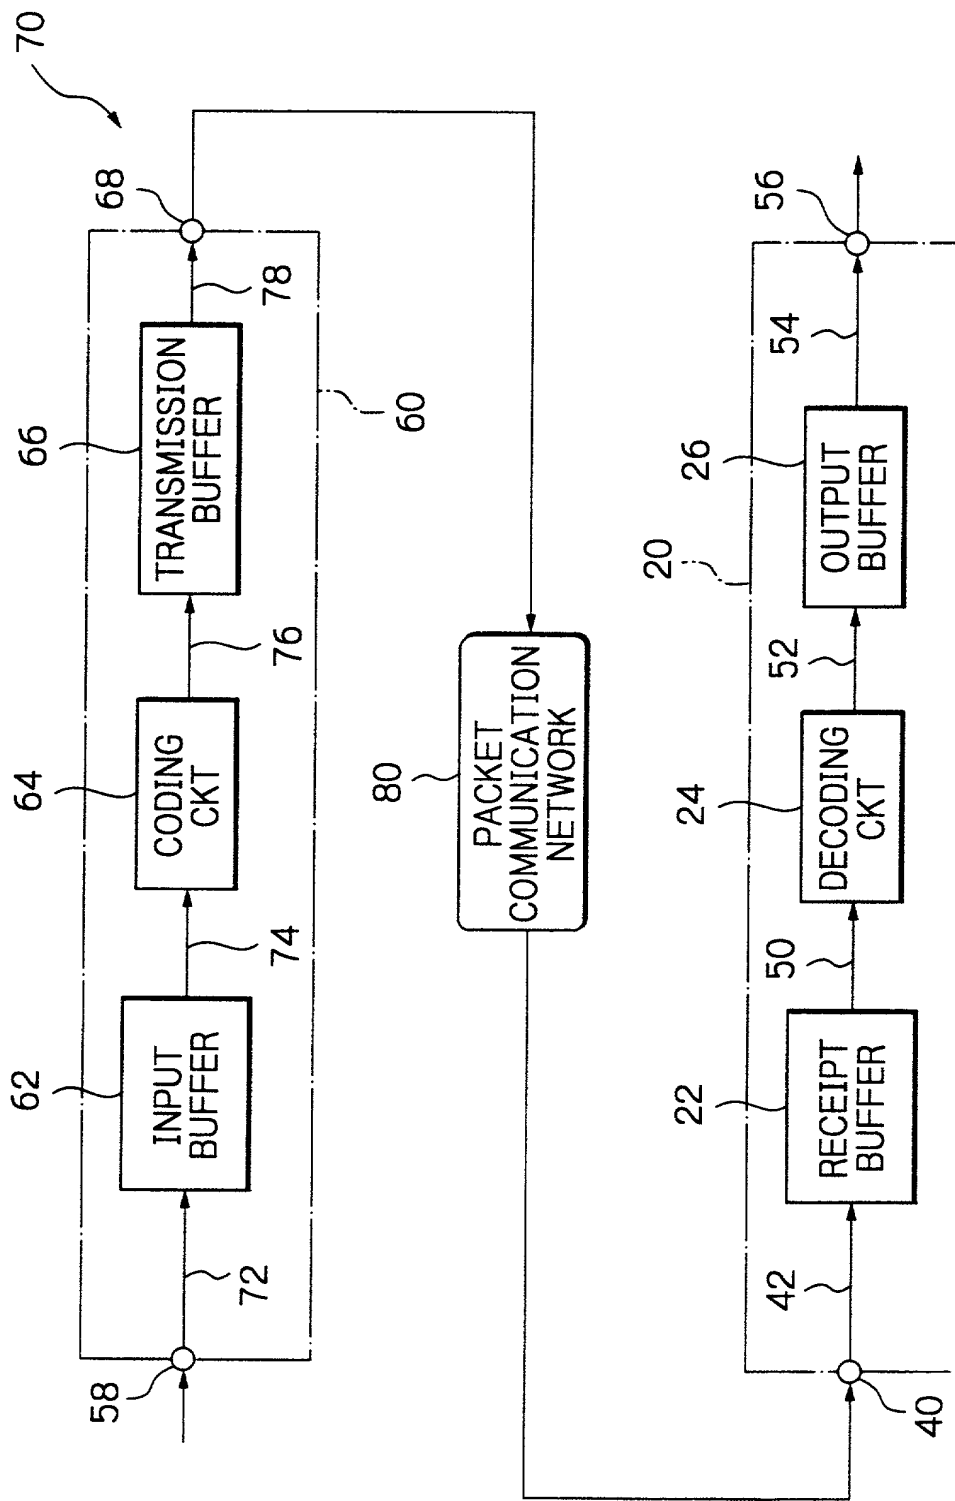


Fig. 4

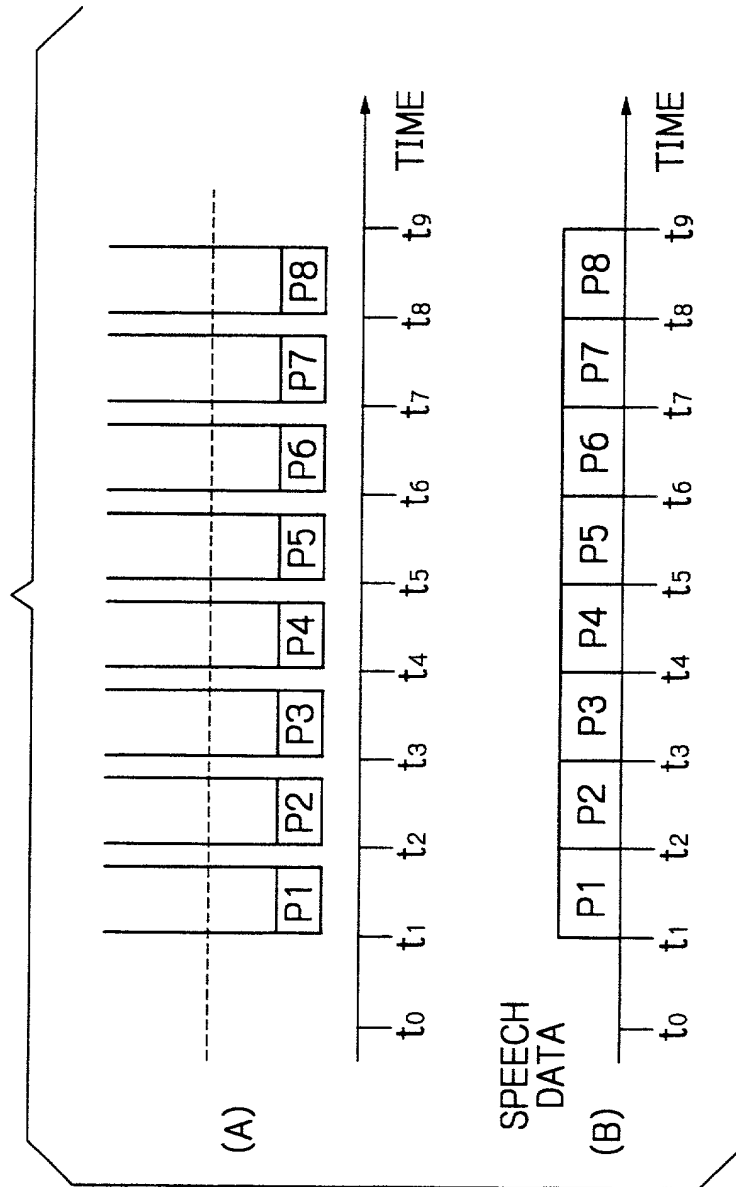


Fig. 5

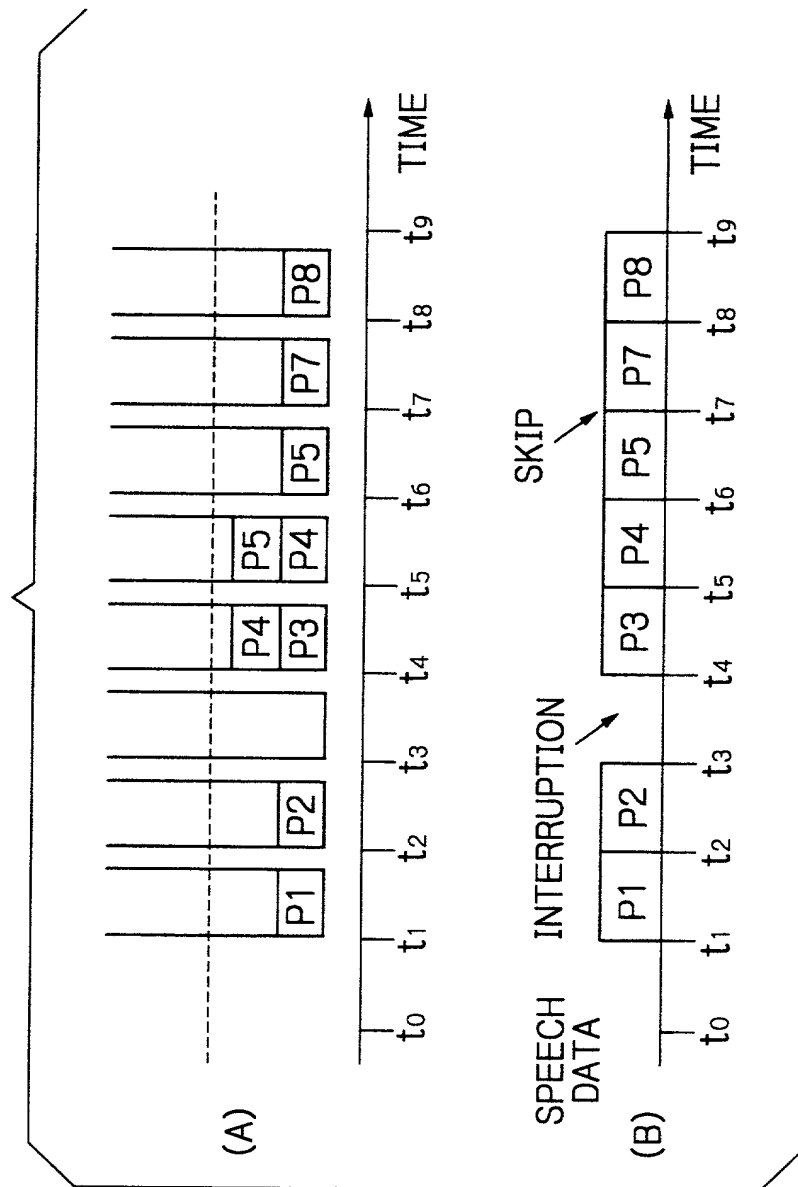


Fig. 6

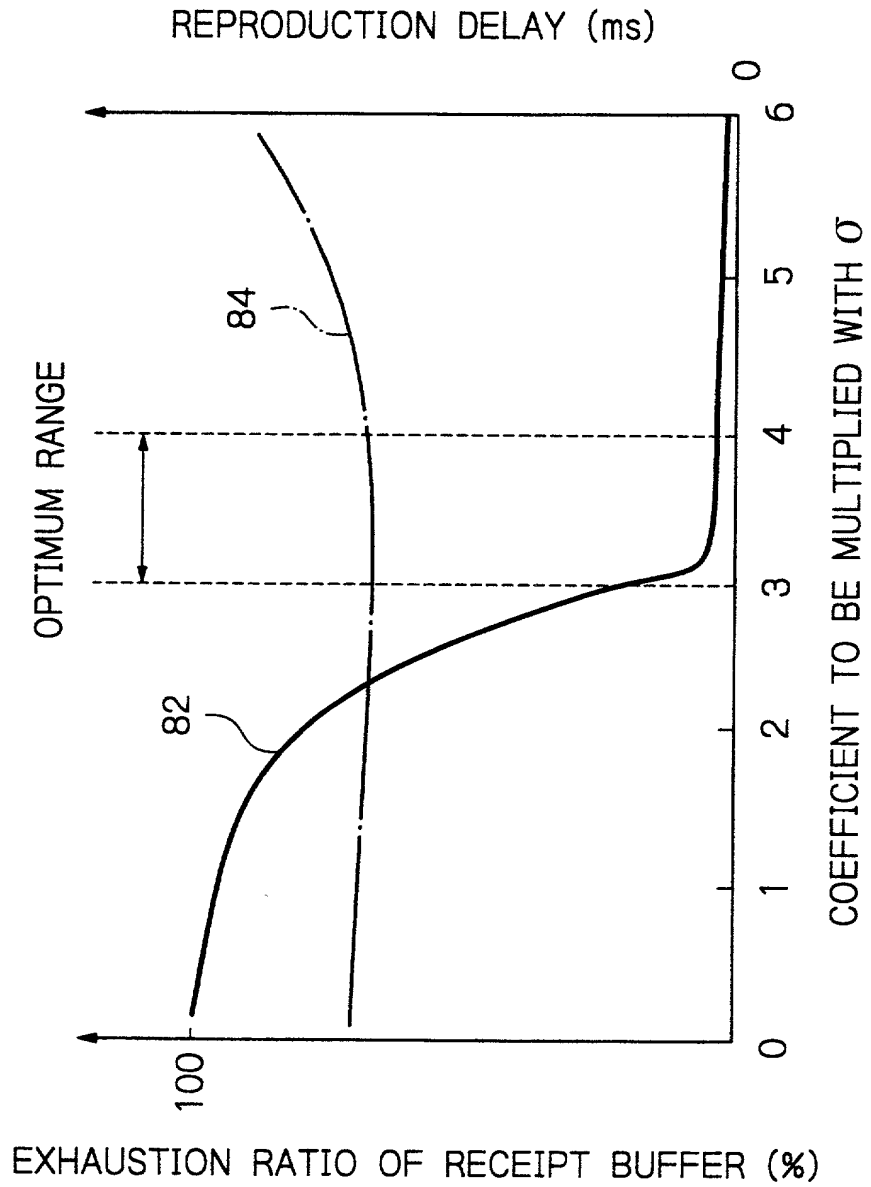


Fig. 7

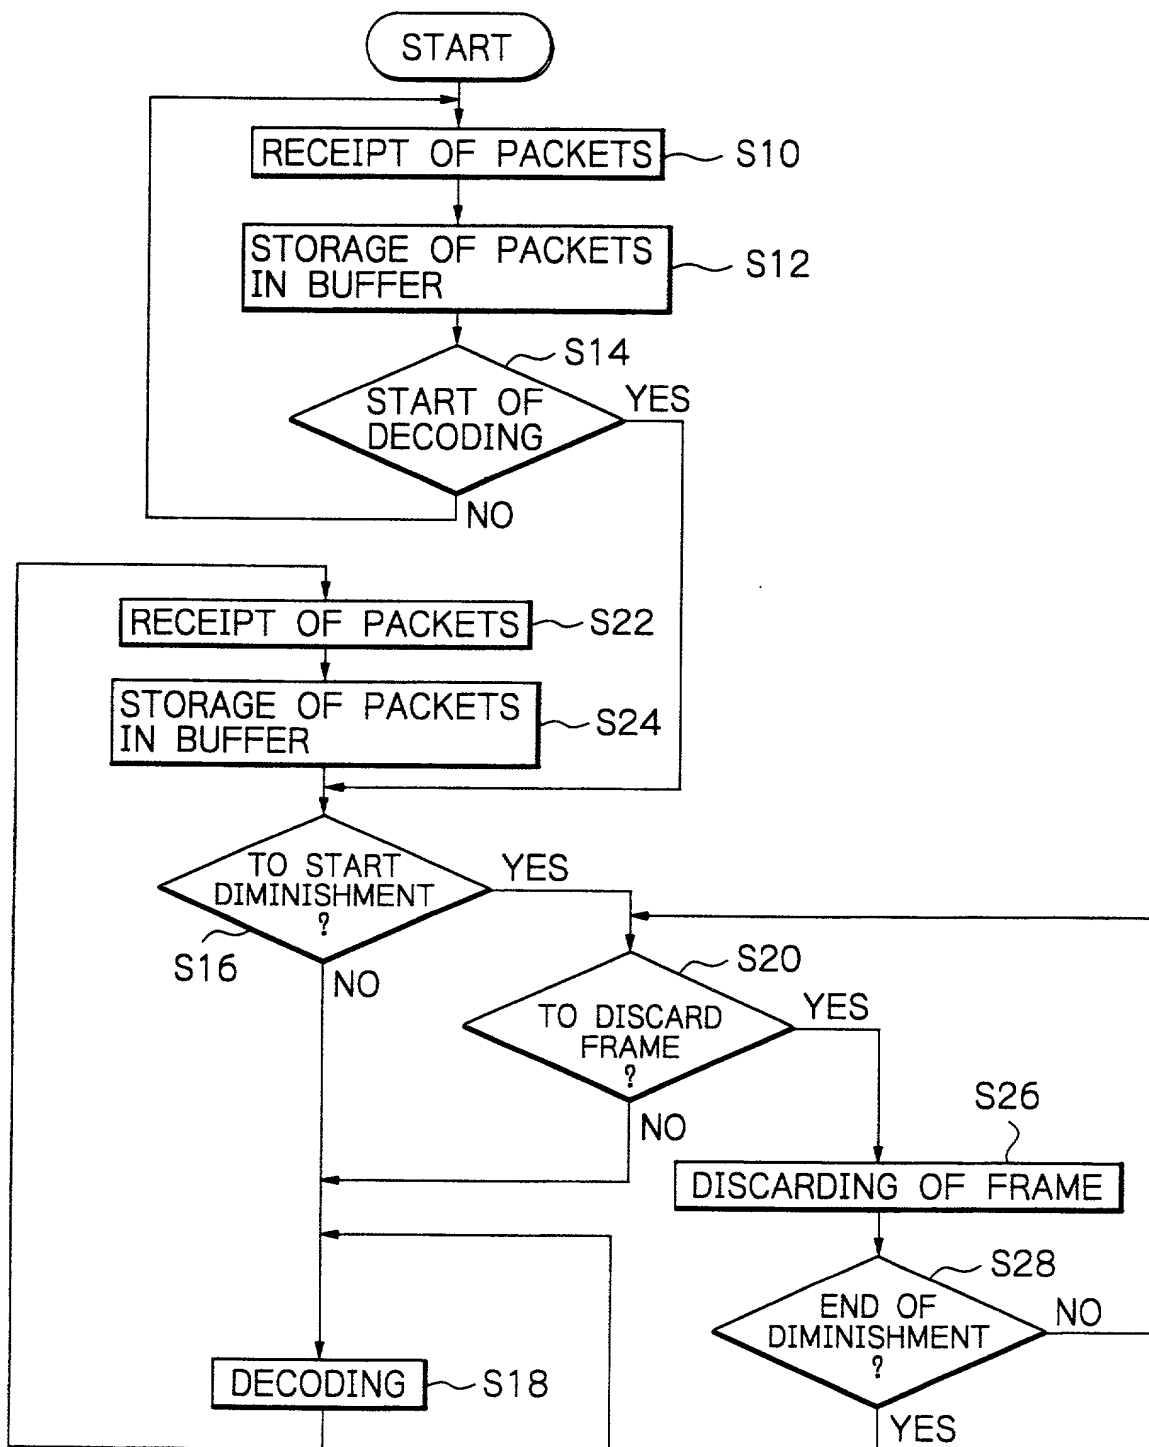


Fig. 8

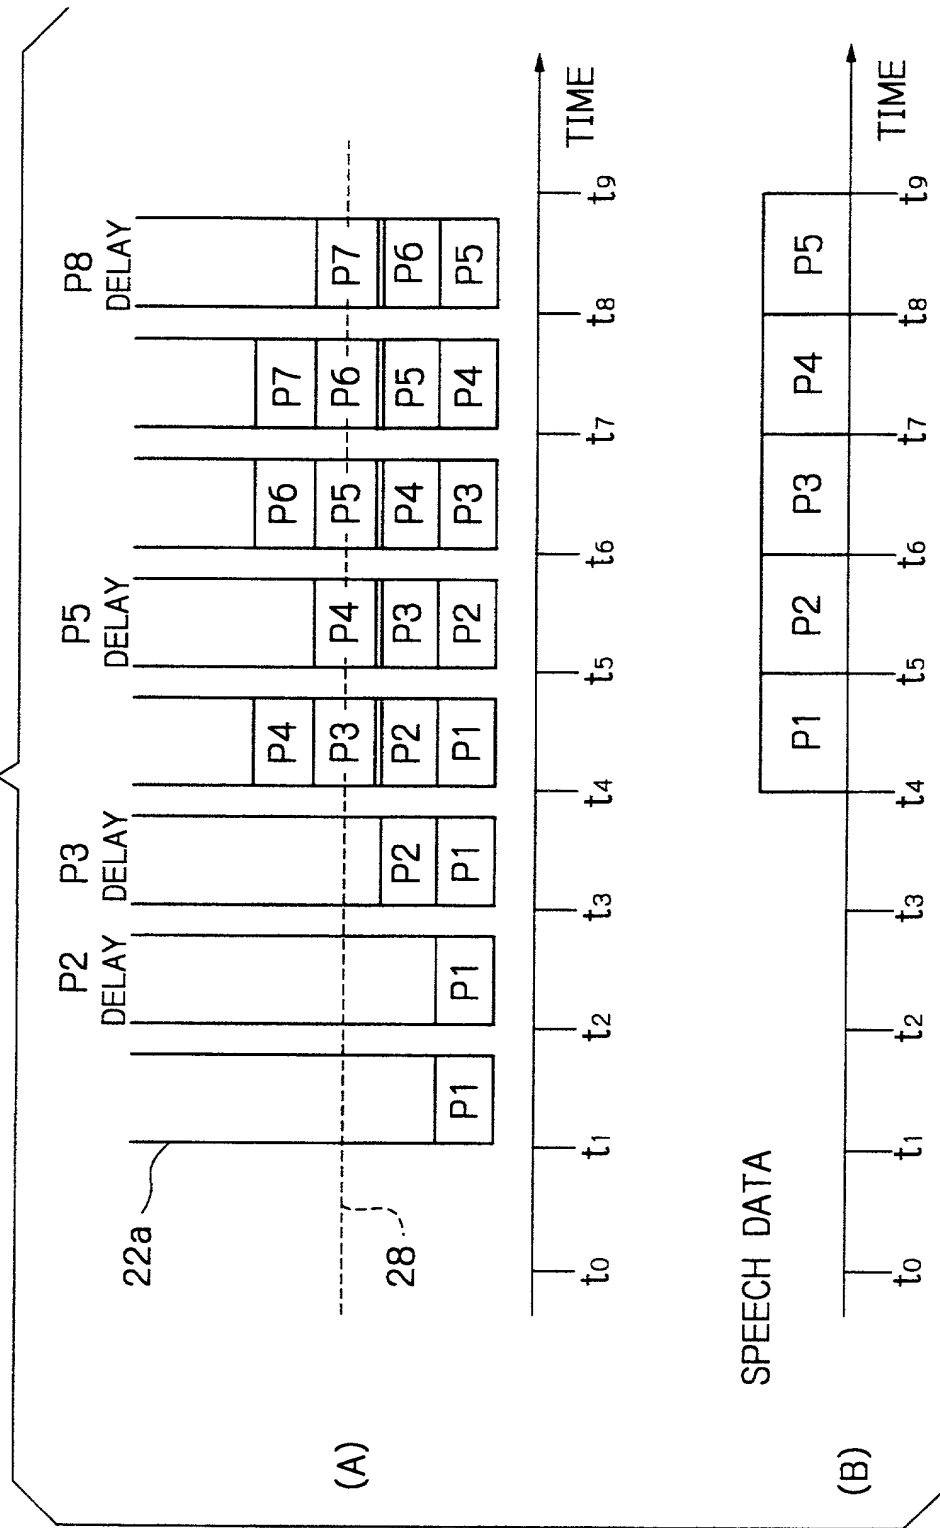




Fig. 9

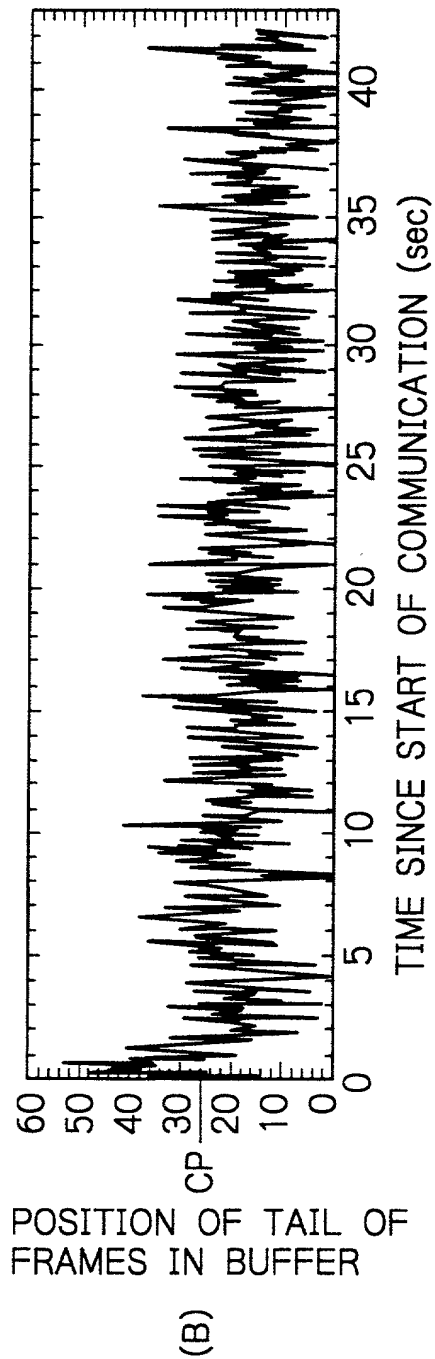
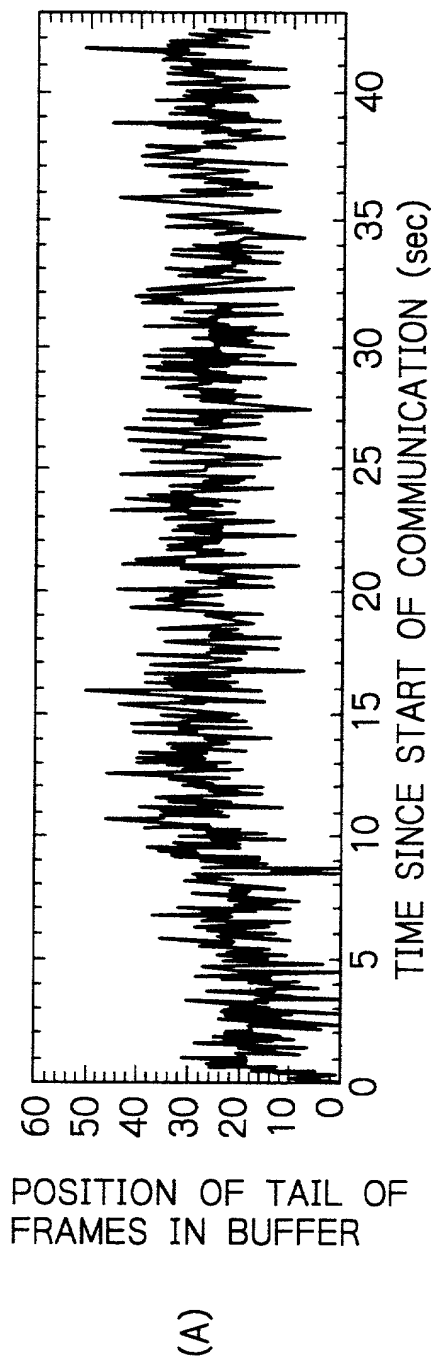




Fig. 11

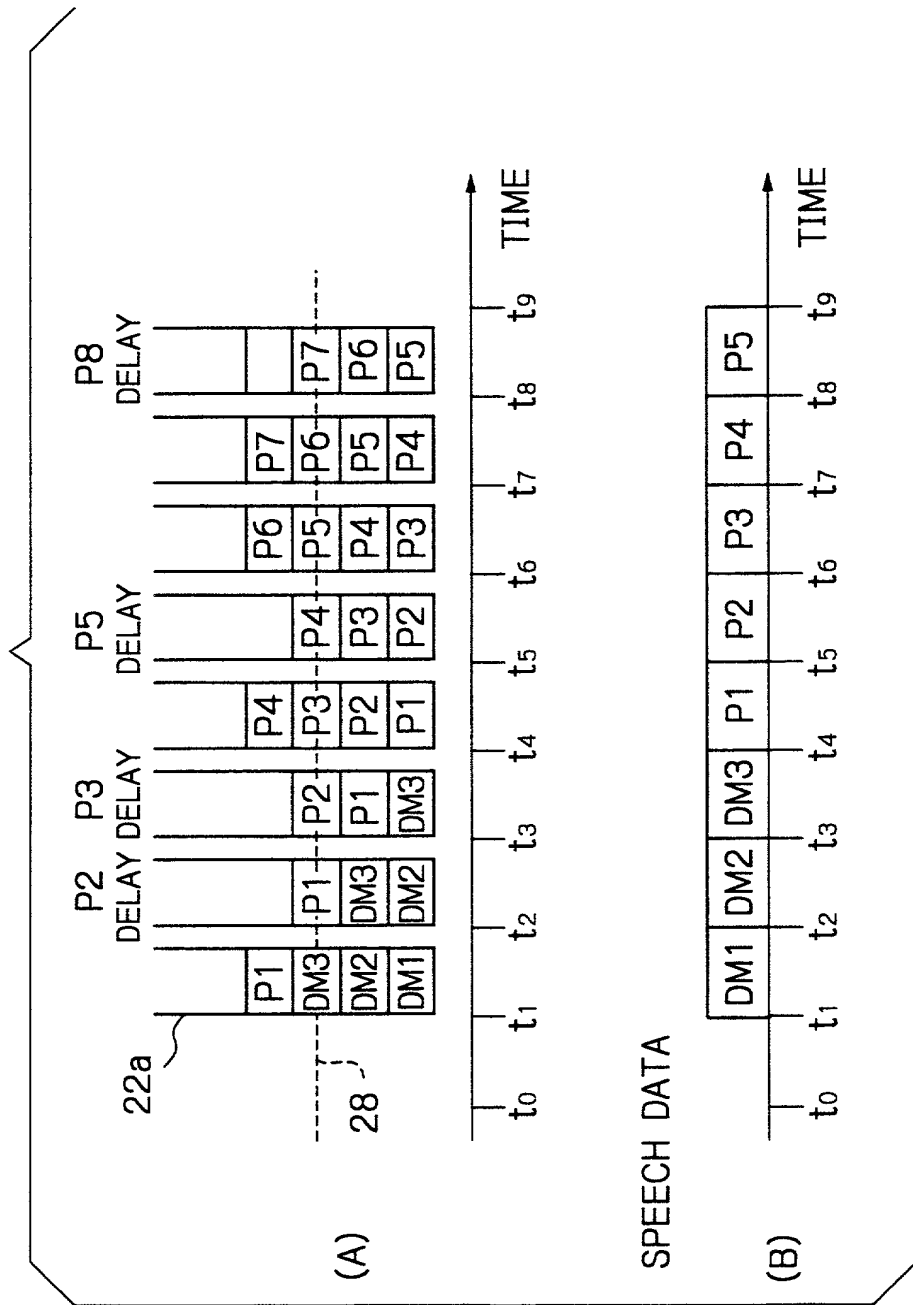
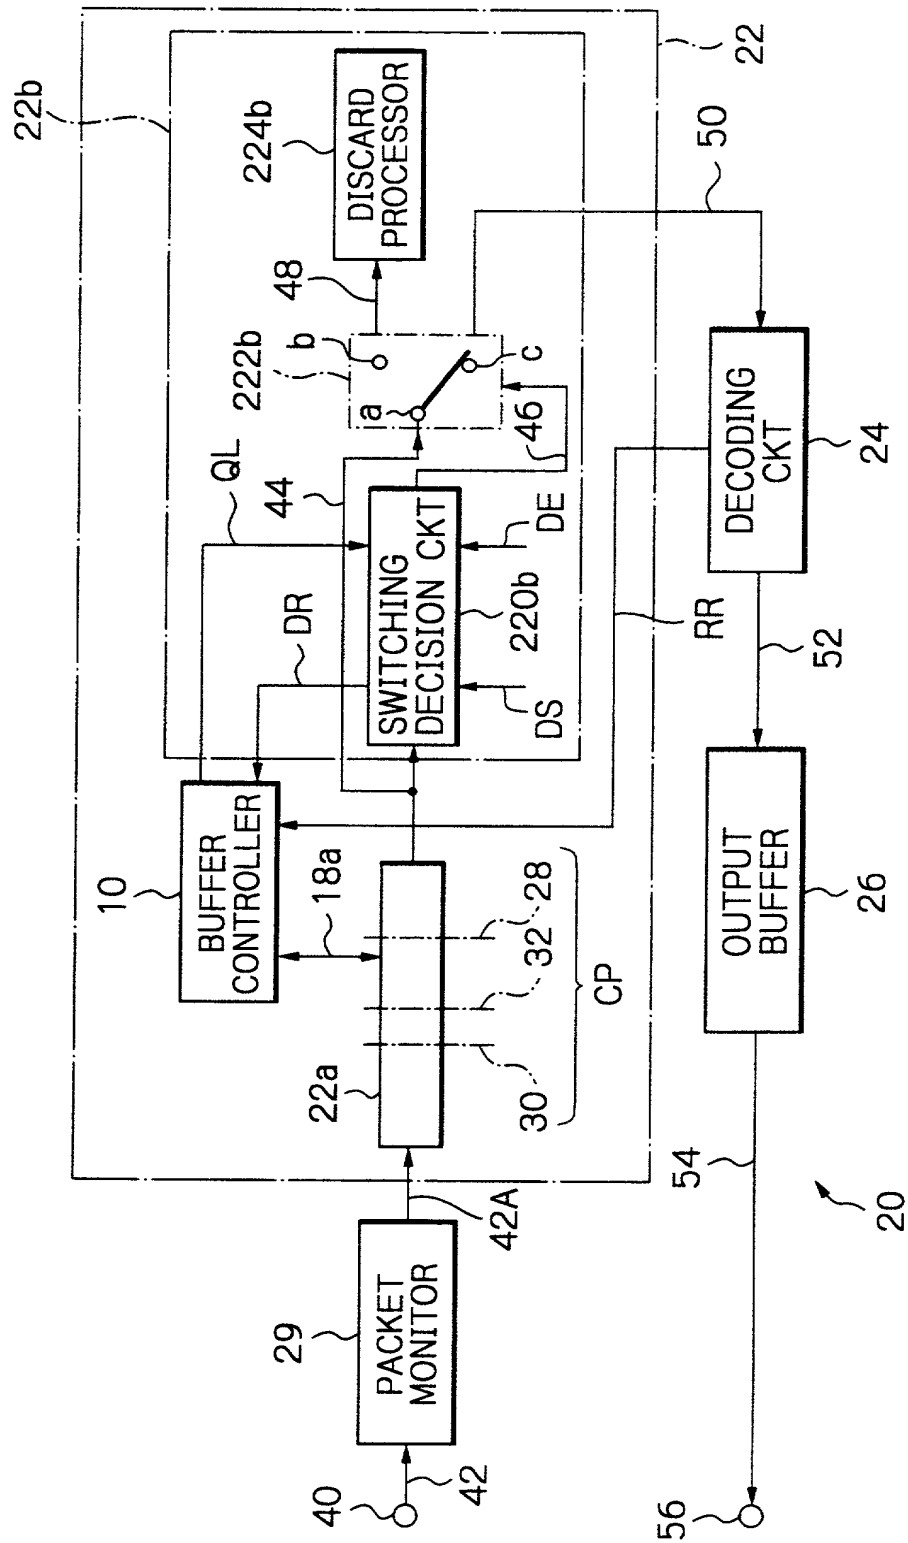


Fig. 12



*Fig. 13*

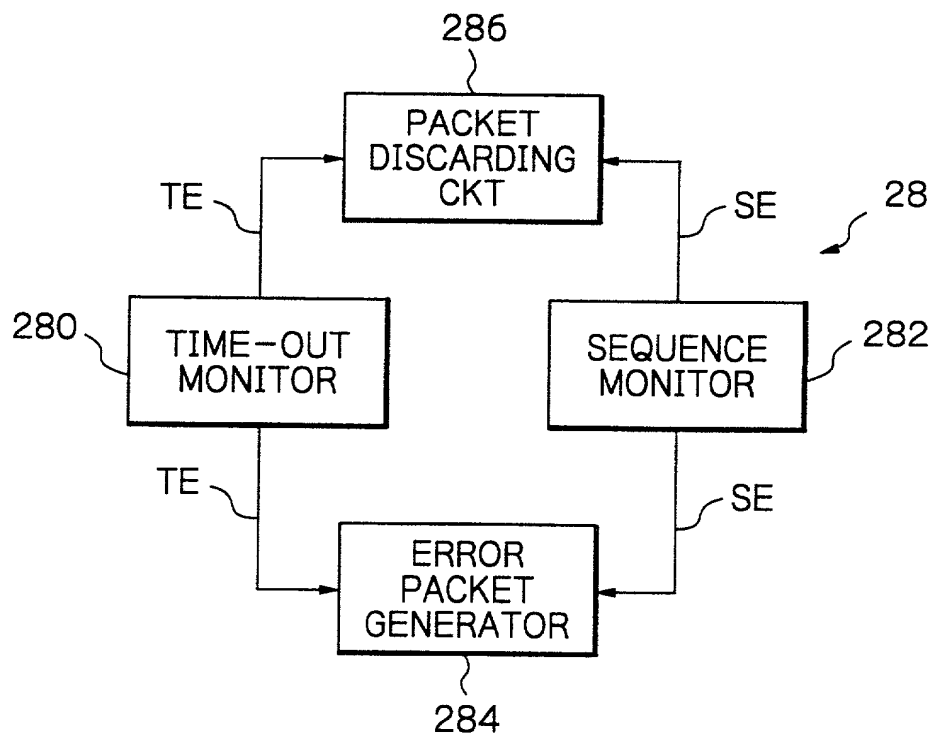


Fig. 14


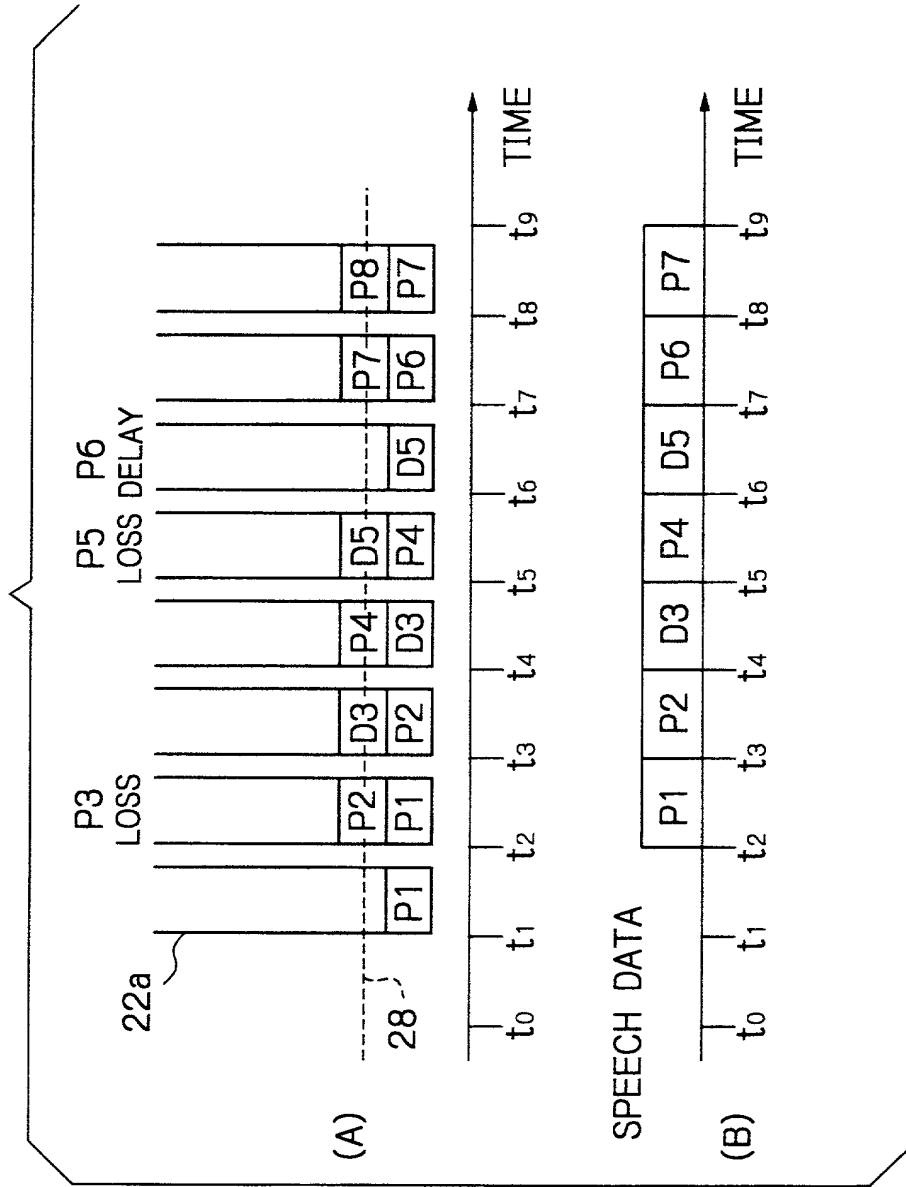


Fig. 15

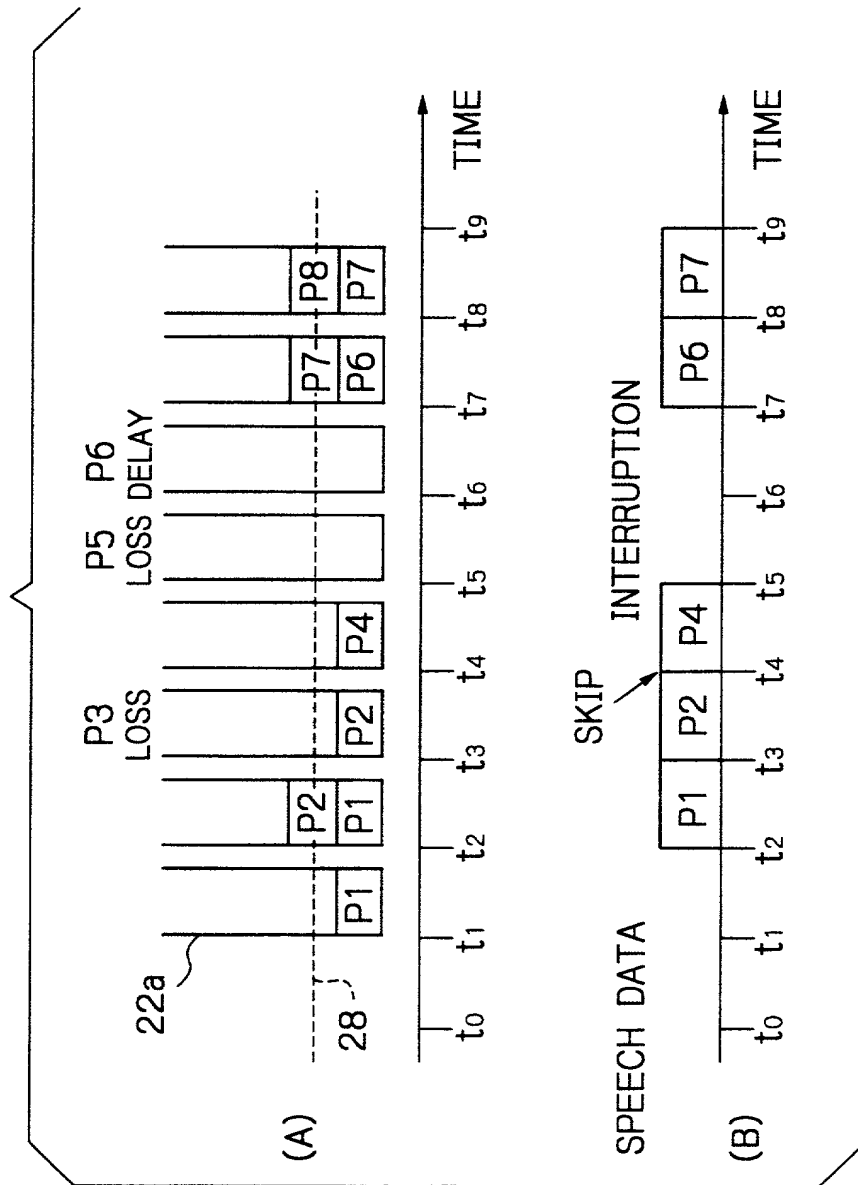

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**Declaration and Power of Attorney For Patent Application****特許出願宣言書及び委任状****Japanese Language Declaration****日本語宣言書**

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

PACKET RECEIVER WITH THE INFLUENCE OF  
JITTER AND PACKET LOSSES REDUCED BEFOREA BUFFER BECOMES IDLE DUE TO DATA DELAYS  
AND PACKET RECEIVING METHOD USING THE SAME

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

the specification of which is attached hereto unless the following box is checked:

☐ 月 日に提出され、米国出願番号または特許協定条約  
国際出願番号を \_\_\_\_\_ とし、  
(該当する場合) \_\_\_\_\_ に訂正されました。☐ was filed on \_\_\_\_\_  
as United States Application Number or  
PCT International Application Number  
\_\_\_\_\_ and was amended on  
\_\_\_\_\_ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されるとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.



**Japanese Language Declaration**

(日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づく国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示しています。

Prior Foreign Application(s)

外国での先行出願

2000-85744

(Number)

(番号)

JAPAN

(Country)

(国名)

(Number)

(番号)

(Country)

(国名)

私は、第35編米国法典119条(e)項に基づいて下記の米国外特許出願規定に記載された権利をここに主張いたします。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、下記の米国法典第35編120条に基づいて下記の米国外特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づく権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国外特許出願に開示されていない限り、その先行米国外出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

(Application No.)

(出願番号)

(Filing Date)

(出願日)

(Application No.)

(出願番号)

(Filing Date)

(出願日)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じているところに基づく表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行なえば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365 (b) of any foreign application(s) for patent or inventor's certificate, or 365 (a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, b checking the box, any foreign application for patent of inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed

優先権主張なし

March 27, 2000

(Day/Month/Year Filed)

(出願年月日)

(Day/Month/Year Filed)

(出願年月日)

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.)

(出願番号)

(Filing Date)

(出願日)

I hereby claim benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States of PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application.

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

(Status: Patented, Pending, Abandoned)

(現況: 特許許可済、係属中、放棄済)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and the such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

**Japanese Language Declaration**

(日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

Steven M. Rabin (Reg. No. 29,102), Thomas M. Champagne (Reg. No. 36,478), Robert H. Berdo, Jr. (Reg. No. 38,075) and Charles W. Peterson, Jr. (Reg. No. 34,406)

書類送付先

Send Correspondence to:

**RABIN & CHAMPAGNE, P.C.,**  
1101 14th Street, Suite 500, Washington, D.C. 20005

直接電話連絡先： (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Steven M. Rabin  
RABIN & CHAMPAGNE, P.C.

Telephone: (202) 659-1915, Fax: (202) 659-1898

唯一または第一発明者名	Full name of sole or first inventor	
	Shinji Hayakawa	
発明者の署名	Inventor's signature	Date
日付	Shinji Hayakawa	October 4, 2000
住所	Residence	
	Tokyo, JAPAN	
国籍	Citizenship	
Japanese		
私書箱	Post Office Address	
c/o Oki Electric Industry Co., Ltd.		
7-12, Toranomon 1-chome, Minato-ku, Tokyo, Japan		
第二共同発明者名	Full name of second joint inventor, if any	
	Satoshi Watanabe	
第二共同発明者の署名	Second inventor's signature	Date
日付	Satoshi Watanabe	October 4, 2000
住所	Residence	
	Tokyo, Japan	
国籍	Citizenship	
Japanese		
私書箱	Post Office Address	
c/o Oki Electric Industry Co., Ltd.		
7-12, Toranomon 1-chome, Minato-ku, Tokyo, Japan		

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

# Japanese Language Declaration

(日本語宣言書)

第三共同発明者名		Full name of third joint inventor, if any Atsushi Shimbo	
第三共同発明者の署名	日付	Third inventor's signature Atsushi Shimbo	Date October 6, 2000
住所		Residence A.S. Fush Tochigi, JAPAN	
国籍		Citizenship Japanese	
私書箱		Post Office Address c/o Oki Electric Industry Co., Ltd. 7-12, Toranomon 1-chome, Minato-ku, Tokyo, Japan	
第四共同発明者名		Full name of fourth joint inventor, if any Hiromi Aoyagi	
第四共同発明者の署名	日付	Fourth inventor's signature Hiromi Aoyagi	Date October 6, 2000
住所		Residence H.A. Kanagawa Tokyo, JAPAN	
国籍		Citizenship Japanese	
私書箱		Post Office Address c/o Oki Electric Industry Co., Ltd. 7-12, Toranomon 1-chome, Minato-ku, Tokyo, Japan	